

# IMP

## IFTMCS – Manifest data Business Integration for the Port of Hamburg

Message Implementation Guide  
Version 1.9.6/E

(Valid from 03.06.2024)

**DAKOSY**  
Datenkommunikationssystem AG

Mattentwiete 2  
20457 Hamburg  
[www.dakosy.de](http://www.dakosy.de)

Phone: + 49 40 37003 - 0  
[info@dakosy.de](mailto:info@dakosy.de)

## Change History

Version	Concerned section	Reason	Name	Datum
1.8		<ul style="list-style-type: none"> <li>- RFF+DIR: Value "TSE" (Transshipment Export) added; Description to value "TS" changed into "Transshipment (Import)".</li> <li>- Specification of terminal in LOC+11 (Port of Discharge) and specification of the related DTM+132 is only required, if the IFTMCS is the basis for the SumA</li> <li>- Terminal information in LOC+9 (Port of Loading) and DTM+133 (ETD) within LOC+9 added, required information, if the IFTMCS is used as Export manifest (RFF+DIR = 'E' or 'TSE').</li> <li>- RFF+AEI can be repeated on header level. This is necessary, since the container belonging to a B/L may have different ENS-MRN (if the container have been declared separately)</li> <li>- LOC+41 within TDT+20 is only required, if the IFTMCS is the basis for the SumA.</li> </ul>	Schwanke	2011-06-28
1.9		<ul style="list-style-type: none"> <li>Incorporation of additional fields for</li> <li>- the generation of the port fee declaration</li> <li>- the generation of the transport order and other comments</li> </ul>	Schwanke	2012-03-21
1.9.1		<ul style="list-style-type: none"> <li>- Layout changes</li> <li>- Previous document type (RFF+AEI)</li> <li>- Range of commodities added</li> </ul>	Dietrich	2012-04-10
1.9.2		<ul style="list-style-type: none"> <li>- NAD + AG changed to EORI</li> </ul>	Dietrich	2012-09-10
1.9.3		<ul style="list-style-type: none"> <li>- New: RFF+BGM:355 enforces EXS in TS</li> <li>- New: RFF+DIR:TC in export manifest for feeder carrier</li> <li>- RFF+AEI: adjustment of field length for reason of exemption according to definitions in ATLAS</li> <li>Addition of description for NAD+PK (BIP)</li> </ul>	Schwanke	2013-10-25
1.9.4		<ul style="list-style-type: none"> <li>- Specification of SG 35/EQD becomes required</li> <li>- MRN pre-arrival declaration in SG22/RFF may also be ENS (beside AE)</li> </ul>	Dietrich	2016-08-08
1.9.6		<ul style="list-style-type: none"> <li>- Exemption in RFF+AEI:.....:OESUMA and UZK adjusted; no structural changes</li> </ul>	Schwanke	2019-12-16
1.9.6		<ul style="list-style-type: none"> <li>- Fax-becomes optional</li> <li>- Fields for EHGE removed. Can still be send, but will be ignored</li> </ul>	Schwanke	2021-03-16
1.9.6		<ul style="list-style-type: none"> <li>- Preliminary paper for ICS2 in RFF+AEI added for ICS2; only allowed on item level!</li> <li>- RFF+AEI...ASUMA for EXS-MRN in SG22 also removed from IHB, was already ignored</li> <li>- ftx+HAN removed, was already ignored</li> </ul>	Dietrich	05-02-2024

## Change requests

**DAKOSY**  
**Datenkommunikationssystem AG**  
Mattentwiete 2  
20457 Hamburg

Phone: + 49 40 37003 - 0  
Email: info@dakosy.de

## Used tools

Number	Used tools
W1	This document was created with the word processing programme <b>MS Word 2021</b> .
W2	Segment descriptions and diagrams were created with <b>GEFEX-FX, version 7 - 2023-Q3</b> .

## Applicable Documents

The EDI manual “General Part” provides descriptions about main principles established for each data interchange via DAKOSY. The definitions set out therein, the customer’s cooperation duties as well as the basis of the communication process also apply for the interface described in the manual at hand.

---

## Table of contents

<b>1</b>	<b>The Manifest message - IFTMCS .....</b>	<b>5</b>
<b>2</b>	<b>Technical Structure .....</b>	<b>5</b>
<b>3</b>	<b>Manifest usage in the IMP.....</b>	<b>6</b>
3.1	Import Information.....	6
3.2	Enquiries/Research by government agencies.....	6
3.3	Initiating the summary declaration for temporary storage.....	6
<b>4</b>	<b>Manifest data outside of IMP.....</b>	<b>7</b>
4.1	Entry Summary Declaration.....	7
4.2	Re-Export Notification and Exit Summary Declaration .....	7
<b>5</b>	<b>Additional usage information for this guide.....</b>	<b>7</b>
<b>6</b>	<b>Message Structure.....</b>	<b>8</b>
<b>7</b>	<b>Branching diagram .....</b>	<b>13</b>
<b>8</b>	<b>Segment description .....</b>	<b>31</b>

# 1 The Manifest message - IFTMCS

This document describes the interface used to transmit (shipment) manifest data from the carrier to the Import Management Platform.

In the IMP, the carrier can fulfil various tasks with this message:

- Creation of summary declaration for temporary storage by the terminal operators
- Generation of ZAPP/EMP declarations for transhipments (B- or S-number)
- Forwarding of manifest data to authorities, legal basis provided
- Declaration of removal via feeder, provided that the feeder carrier has registered for this function.

## 2 Technical Structure

The IFTMCS contents are structured like B/L data. Therefore, it is not possible to send a single IFTMCS containing all of the manifest data for a vessel. Instead, IFTMCS messages (“UNH-UNT-Blocks”) can be grouped together in an EDIFACT interchange (“UNB-UNZ”) as shown below:

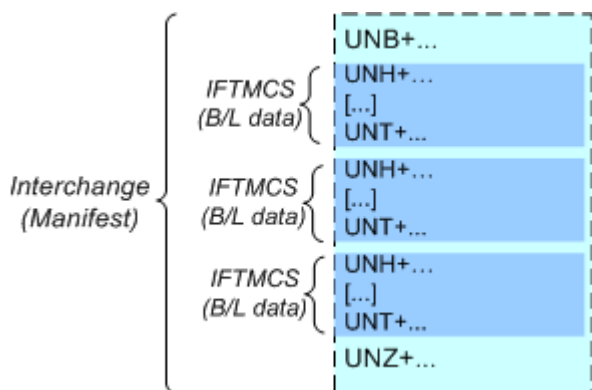


Illustration 1: Structure of an IFTMCS Interchange

## **3 Manifest usage in the IMP**

### **3.1 Import Information**

Within IMP, manifest data serves a number of purposes. One of the main uses is matching manifest data with data from Import Operation Instruction messages, resulting in a complete set of import information.

### **3.2 Enquiries/Research by government agencies**

Customs as well as other government agencies (e. g. Water Police, Veterinary and import office, plant-health control) use manifest data as a basis for research purposes.

Data is only passed on to other parties in accordance with legal bases.

### **3.3 Initiating the summary declaration for temporary storage**

The main function of the IFTMCS message is to provide a basis for the creation of the summary declaration.

If the IFTMCS data should be used as a basis for the summary declaration of temporary storage, one of the RFF segments in segment group 3 has to have it's qualifier set to "BGM" and element 1154 of that segment has to have a value of "929".

If the IFTMCS data should not be used for sending declarations to customs one should send an RFF segment in segment group 3 with it's qualifier being set to "BGM" and element 1154 of that segment having a value of "707".

## 4 Manifest data outside of IMP

### 4.1 Entry Summary Declaration

There is a close link between the IFTMCS interface in IMP and the IFTMCS interface, which is provided by DAKOSY as the basis for triggering the Entry/Exit Summary Declaration in ICS2 or ATLAS.

Structurally, the interfaces for the Entry Summary Declaration and the IFTMCS are almost identical. A number of segments are used differently or is not necessary for the respective function, which is why the IFTMCS for IMP and the Entry Summary Declaration were not completely merged.

### 4.2 Re-Export Notification and Exit Summary Declaration

For transshipments, the delivery of a so called Re-Export Notification or an Exit Summary Declaration (Exit SumA, ASumA) is mandatory if the goods to be exported have not already been declared for export as part of a „normal“ AES procedure.

For the port of Hamburg this declarations have to be carried out in ZAPP / EMP. The declarations can be generated by using the IFTMCS data.

On our homepage you will find further information:

- [Produktblatt Transshipment](#) in the section *Downloads*
- [Transshipment process description](#)

## 5 Additional usage information for this guide

As described before, data from the IFTMCS message might serve a variety of purposes. To give a more detailed description of how the data is used, the following information has been added to the segment description in this guide:

- Field (X): This field is used for function X as described here
- Description (X): Additional information regarding the usage of a field for function X

Currently, the following functions are described this way:

- X = „SumA“: Use within the scope of the summary declaration
- X = „ZAPP“: Use within the scope of the re-export notification
- X = „EXS“: Use of data for the exit-SumA

---

## 6 Message Structure


Counter	No	Tag	St	MaxOcc	Level	Content	
	0000	1	UNA	C	1	0	Service string advice
	0000	2	UNB	M	1	0	Interchange header
	0010	3	UNH	M	1	0	Message header
	0020	4	BGM	M	1	0	Beginning of message
	0050	5	DTM	R	1	1	Message Creation Date
	0060	6	TSR	D	1	1	Transport service requirements
	0090	7	FTX	C	1	1	Information about a previous Entry Summary Declaration
	0100	8	CNT	C	1	1	Total Gross Weight
	0100	9	CNT	C	1	1	Total number of containers
	0100	10	CNT	C	1	1	Total Number of Pieces
	0100	11	CNT	C	1	1	Number of Positions
	0120		SG1	O	1	1	LOC
	0130	12	LOC	M	1	1	Place/location identification
	0180		SG3	R	1	1	B/L Number (Commercial Reference Number)
	0190	13	RFF	M	1	1	B/L Number (Commercial Reference Number)
	0180		SG3	C	1	1	Release order reference
	0190	14	RFF	M	1	1	Reference
	0200	15	DTM	C	1	2	Date of expiry
	0180		SG3	O	1	1	Forwarder's Reference
	0190	16	RFF	M	1	1	Forwarders Reference
	0180		SG3	R	1	1	Transport Direction Indicator
	0190	17	RFF	M	1	1	Transport Direction Indicator
	0180		SG3	O	1	1	Indicator for generation of summary declaration of temporary storage
	0190	18	RFF	M	1	1	Indicator for generation of summary declaration of temporary storage
	0180		SG3	O	1	1	RFF
	0190	19	RFF	M	1	1	Indicator for generation of Re-Export Notification/EXS
	0180		SG3	D	1	1	RFF
	0190	20	RFF	M	1	1	Original Message Reference
	0180		SG3	D	1	1	ID of previous customs declaration
	0190	21	RFF	M	1	1	ID of previous customs declaration
	0180		SG3	D	1	1	RFF
	0190	22	RFF	M	1	1	Customs Reference to summary declaration
	0180		SG3	C	1	1	Job order code oncarriage transport
	0190	26	RFF	M	1	1	Reference
	0460		SG8	R	1	1	TDT-SG9-SG9-SG9-SG9-SG10-SG10
	0470	27	TDT	M	1	1	Vessel Information
	0500		SG9	R	1	2	Port of discharge
	0510	28	LOC	M	1	2	Place/location identification
	0520	29	DTM	D	1	3	ETA at Port of Discharge
	0520	30	DTM	O	1	3	Date/time/period
	0500		SG9	D	1	2	Port of Loading
	0510	31	LOC	M	1	2	Place/location identification
	0520	32	DTM	D	1	3	Date/time/period
	0520	33	DTM	O	1	3	Date/time/period
	0500		SG9	O	1	2	Final port of discharge
	0510	34	LOC	M	1	2	Place/location identification
	0500		SG9	D	1	2	Information about the first customs office at entry
	0510	37	LOC	M	1	2	Declared first customs office at entry


Counter	No	Tag	St	MaxOcc	Level	Content	
	0520	38	DTM	R	1	3	ETA according to ENS declaration
	0530		SG10	R	1	2	RFF
	0540	39	RFF	M	1	2	Vessel Call Sign
	0530		SG10	O	1	2	RFF
	0540	40	RFF	M	1	2	DAKOSY- or SIS Voyage Number
	0460		SG8	O	1	1	On-Carriage
	0470	41	TDT	M	1	1	Information about On-Carriage
	0500		SG9	R	1	2	LOC-DTM-DTM
	0510	42	LOC	M	1	2	Place/location identification
	0520	43	DTM	D	1	3	Date/time/period
	0520	44	DTM	C	1	3	Pickup Date
	0530		SG10	O	1	2	DAKOSY- or SIS Voyage Number
	0540	45	RFF	M	1	2	DAKOSY- or SIS Voyage Number
	0560		SG11	C	1	1	NAD-SG12
	0570	46	NAD	M	1	1	Information about the presenter / the company lodging the declaration
	0600		SG12	C	1	2	CTA-COM-COM
	0610	47	CTA	M	1	2	Contact information
	0620	48	COM	M	2	3	Communication contact
	0620	49	COM	C	1	3	Fax
	0560		SG11	O	1	1	Carrier, Container operator
	0570	51	NAD	M	1	1	Information about the carrier
	0600		SG12	C	1	2	CTA-COM
	0610	52	CTA	M	1	2	Contact information
	0620	53	COM	C	9	3	Communication contact
	0560		SG11	O	1	1	Shipper
	0570	55	NAD	M	1	1	Information about the shipper/consignor
	0560		SG11	O	1	1	Consignee
	0570	57	NAD	M	1	1	Information about the consignee
	0600		SG12	C	9	2	Notification contact
	0610	58	CTA	M	1	2	Contact information
	0620	59	COM	R	9	3	Communication contact
	0600		SG12	C	9	2	Consignees contact
	0610	60	CTA	M	1	2	Contact information
	0620	61	COM	C	3	3	Communication contact
	0560		SG11	O	1	1	Notify
	0570	63	NAD	M	1	1	Notify Party
	0560		SG11	O	1	1	Authorised official (SumA, ATLAS)
	0570	65	NAD	M	1	1	Information about the authorised official
	0560		SG11	C	1	1	Custodian
	0570	68	NAD	M	1	1	Custodian
	0740		SG15	R	1	2	RFF
	0750	70	RFF	M	1	2	Storage Location
	0560		SG11	O	1	1	Information about the person lodging a declaration
	0570	71	NAD	M	1	1	Name and address
	0600		SG12	M	9	2	CTA-COM
	0610	72	CTA	M	1	2	Contact information
	0620	73	COM	M	9	3	Contact details of responsible Person
	0560		SG11	C	1	1	Vessel Operator


Counter	No	Tag	St	MaxOcc	Level	Content	
	0570	74	<b>NAD</b>	M	1	1	Name and address
	0890		<b>SG18</b>	R	999	1	GID-TMP-RNG-LOC-LOC-LOC-PIA-FTX-FTX-SG20-SG22-SG22-SG22-SG22-SG23-SG27-SG30
	0900	75	<b>GID</b>	M	1	1	Package information
	0920	76	<b>TMP</b>	O	1	2	Temperature
	0930	77	<b>RNG</b>	O	1	2	Range details
	0950	79	<b>LOC</b>	D	1	2	Country of origin
	0950	80	<b>LOC</b>	R	1	2	Country of destination
	0950	81	<b>LOC</b>	D	1	2	Place of (final) destination
	0970	82	<b>PIA</b>	D	1	2	Commodity code
	0980	83	<b>FTX</b>	R	1	2	Goods Description
	0980	84	<b>FTX</b>	D	1	2	Customs goods status
	0980	85	<b>FTX</b>	D	1	2	Free text
	1040		<b>SG20</b>	R	1	2	MEA
	1050	87	<b>MEA</b>	M	1	2	Gross Weight (Goods Item Level)
	1100		<b>SG22</b>	D	1	2	Information about the previous document (ICS1, will be removed)
	1110	88	<b>RFF</b>	M	1	2	MRN of ENS declaration (Goods Item level) or exemption
	1100		<b>SG22</b>	D	1	2	Information about the previous document (valid with introduction of ICS2)
	1110	89	<b>RFF</b>	M	1	2	MRN of ENS declaration (Goods Item level) or exemption
	1100		<b>SG22</b>	D	9	2	transport document
	1110	90	<b>RFF</b>	M	1	2	Reference
	1100		<b>SG22</b>	C	9	2	Carriers's EORI
	1110	91	<b>RFF</b>	M	1	2	Reference
	1100		<b>SG22</b>	C	9	2	MRN (pre-arrival declaration)
	1110	92	<b>RFF</b>	M	1	2	Reference
	1130		<b>SG23</b>	O	9	2	PCI
	1140	93	<b>PCI</b>	M	1	2	Marks & Numbers
	1260		<b>SG27</b>	D	999	2	SGP-SG28
	1270	94	<b>SGP</b>	M	1	2	Container Numbers, VINs or break bulk references
	1290		<b>SG28</b>	D	1	3	MEA
	1300	95	<b>MEA</b>	M	1	3	Weight per container
	1410		<b>SG30</b>	O	99	2	DGS-FTX
	1420	96	<b>DGS</b>	M	1	2	DG Information
	1430	97	<b>FTX</b>	O	1	3	Technical name (DGS)
	1550		<b>SG35</b>	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-RFF-RFF-RFF-RFF-SG37-SG37
	1560	98	<b>EQD</b>	M	1	1	Container-, Vehicle- or Break Bulk information
	1590	99	<b>MEA</b>	O	2	2	Measurements
	1600	100	<b>DIM</b>	O	5	2	Dimensions
	1610	101	<b>SEL</b>	O	99	2	Seal IDs
	1620	102	<b>TPL</b>	O	1	2	Transport placement
	1640	103	<b>TMP</b>	D	1	2	Temperature
	1650	104	<b>FTX</b>	O	1	2	Free text
	1660	105	<b>RFF</b>	O	9	2	Reference
	1660	106	<b>RFF</b>	O	9	2	Booking number
	1660	107	<b>RFF</b>	D	9	2	Customs Reference to summary declaration (ATB no)
	1660	108	<b>RFF</b>	C	9	2	Reference
	1660	109	<b>RFF</b>	C	9	2	Reference
	1750		<b>SG37</b>	O	1	2	Container Operator


Counter	No	Tag	St	MaxOcc	Level	Content	
┌──┐	1760	110	<b>NAD</b>	M	1	2	Name and address
	1750		<b>SG37</b>	D	1	2	Transportorder: Delivery address
┌──┐	1760	111	<b>NAD</b>	M	1	2	Name and address
	1870	112	<b>UNT</b>	M	1	0	Message trailer
	0000	113	<b>UNZ</b>	M	1	0	Interchange trailer


## 7 Branching diagram

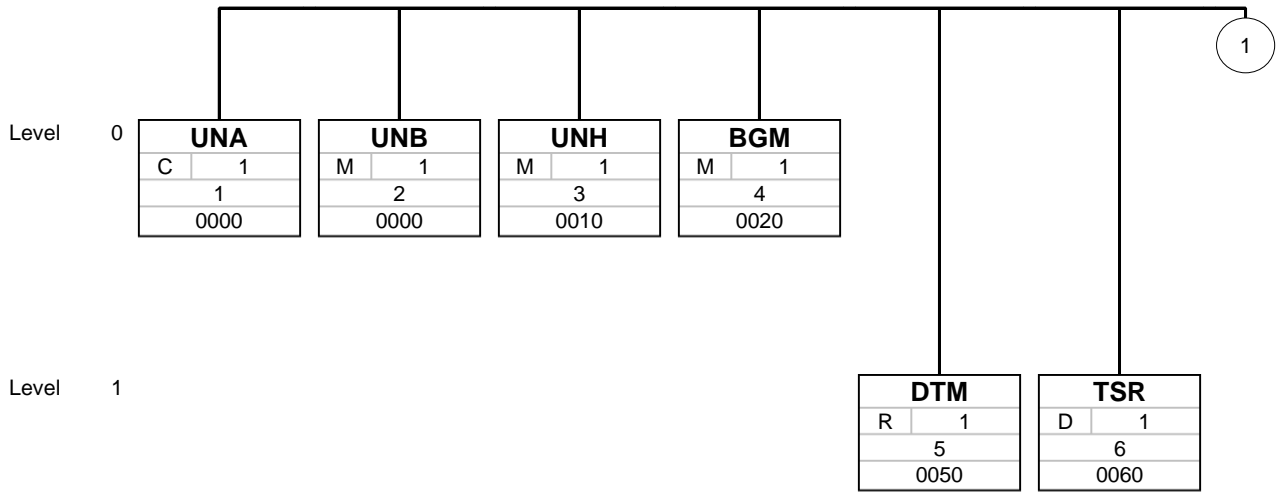


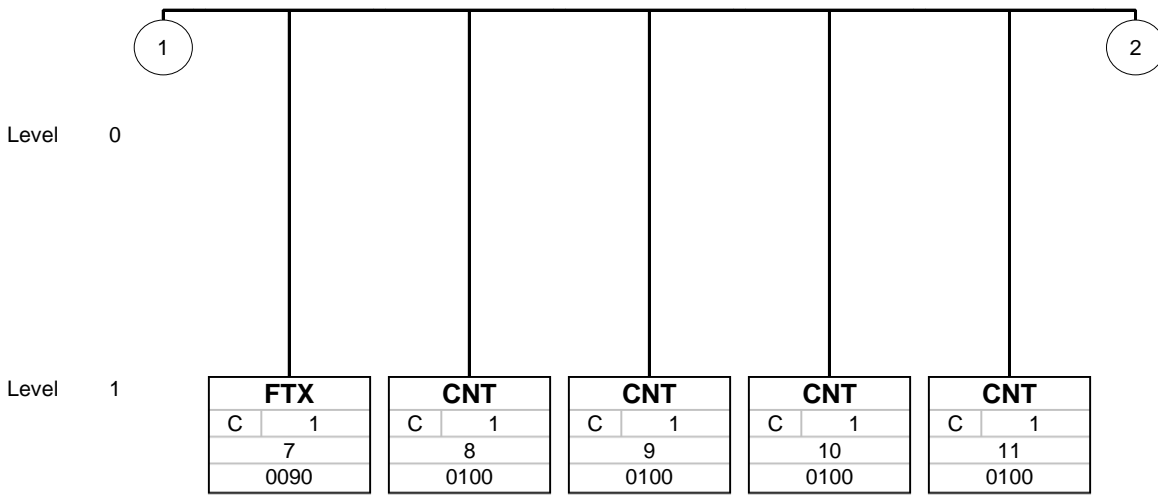


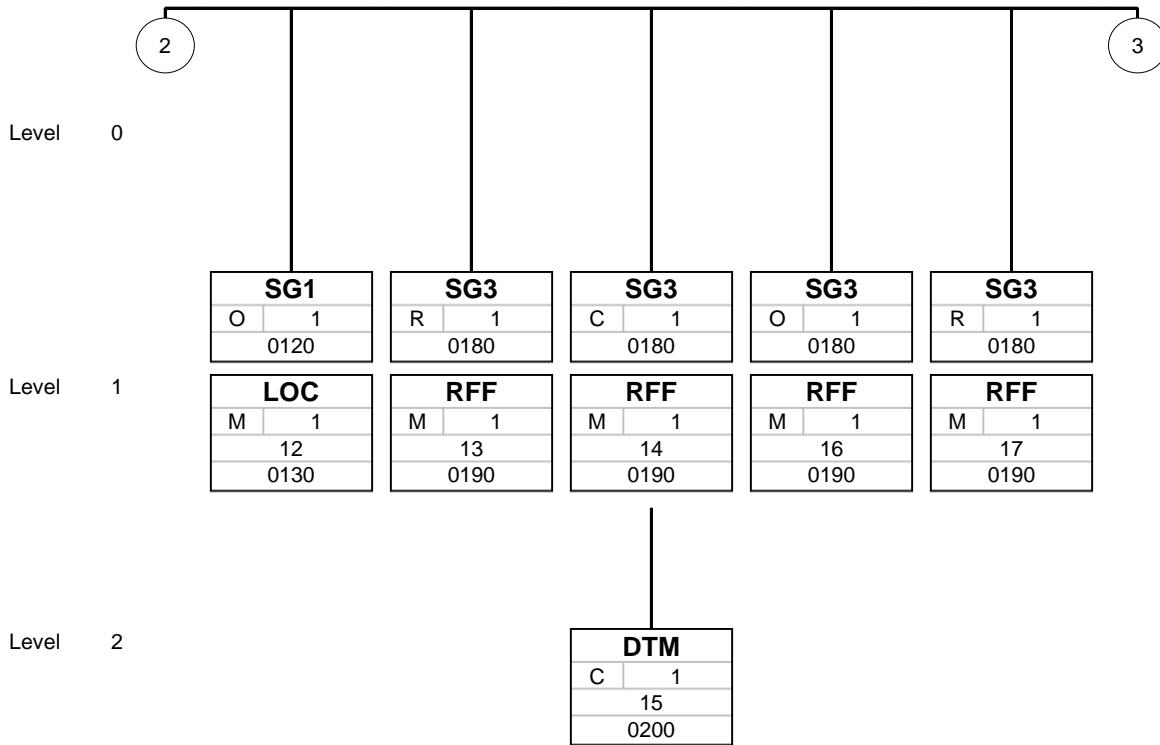


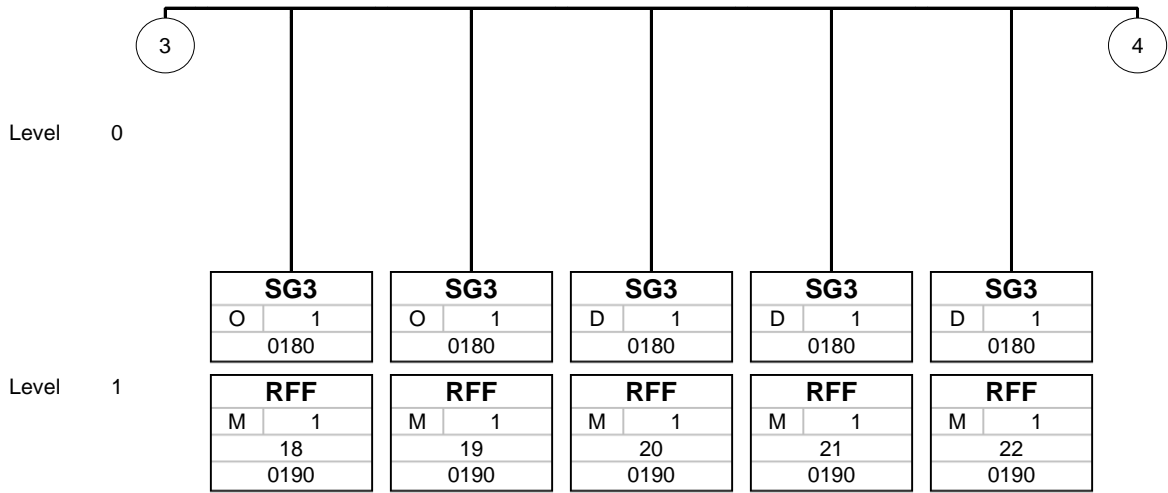


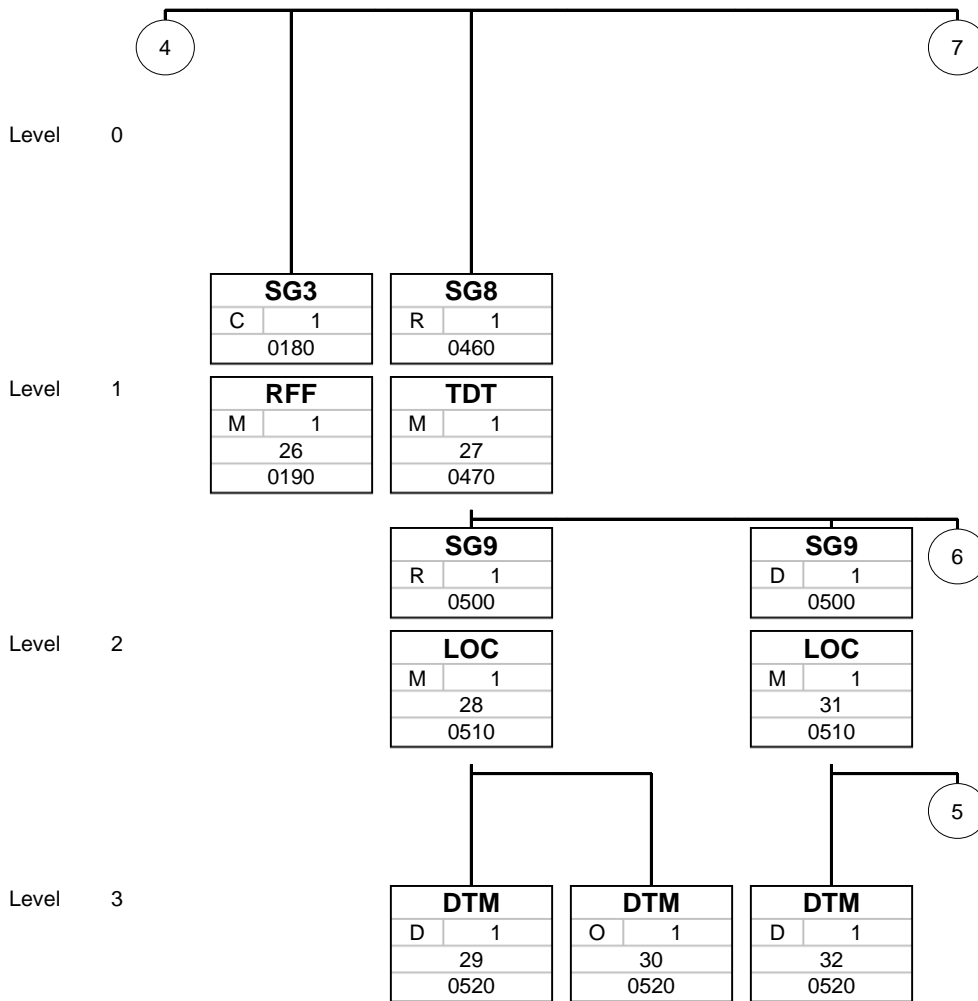


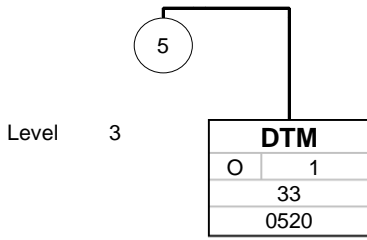


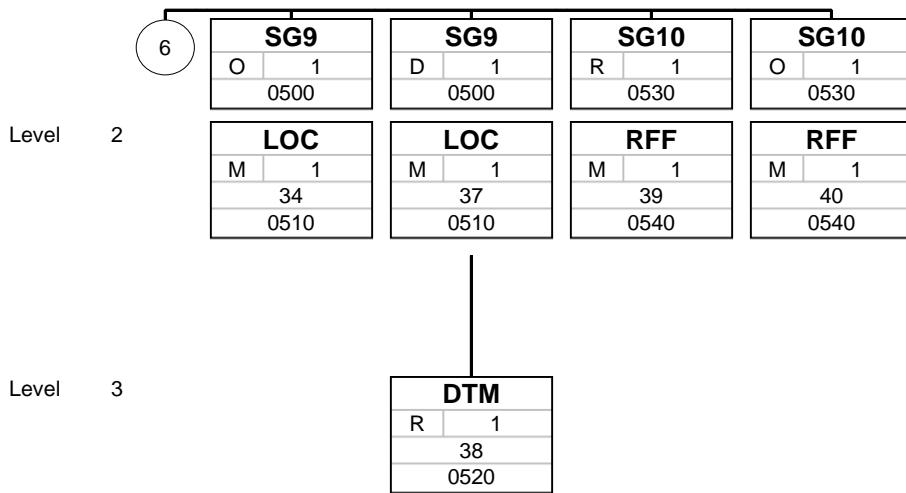


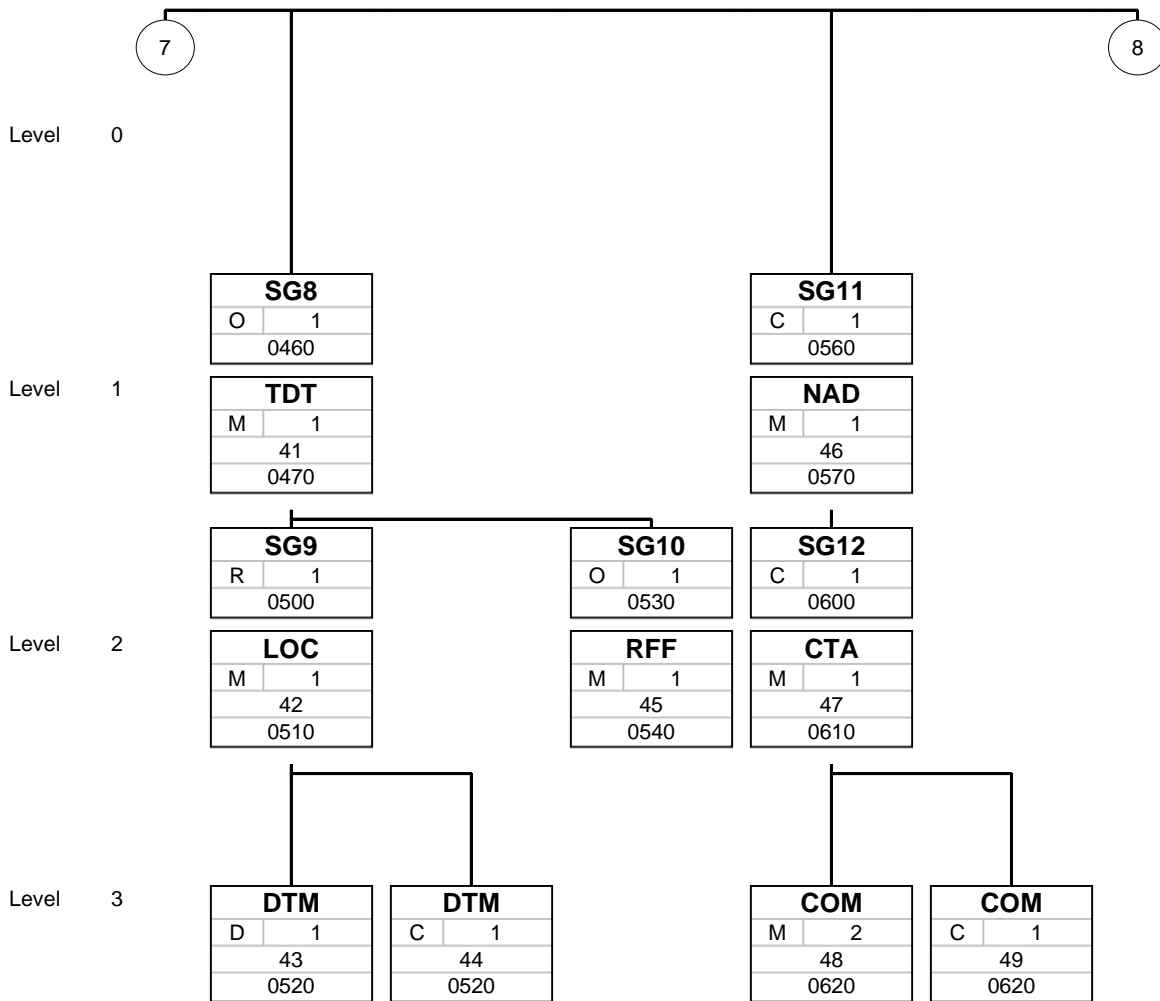


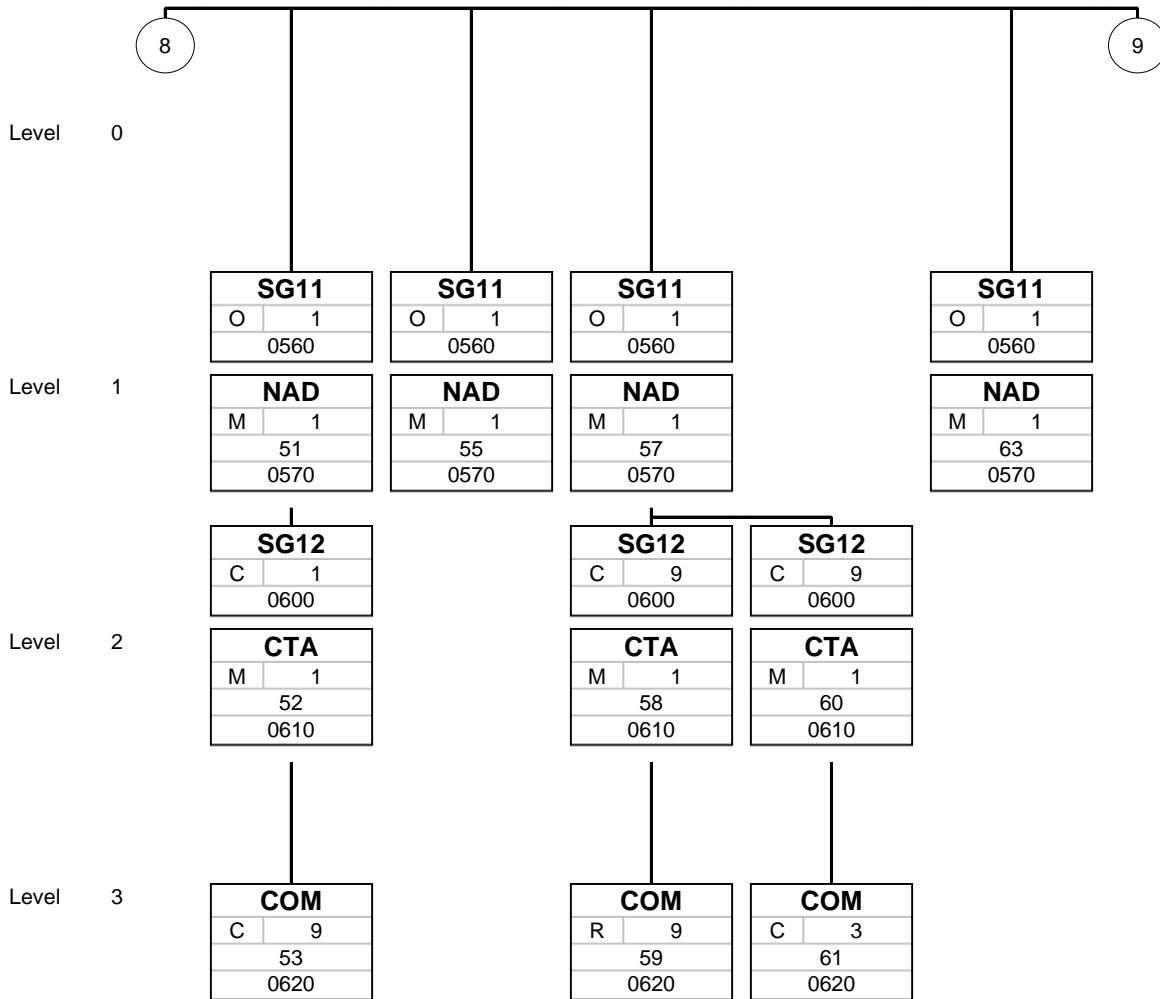


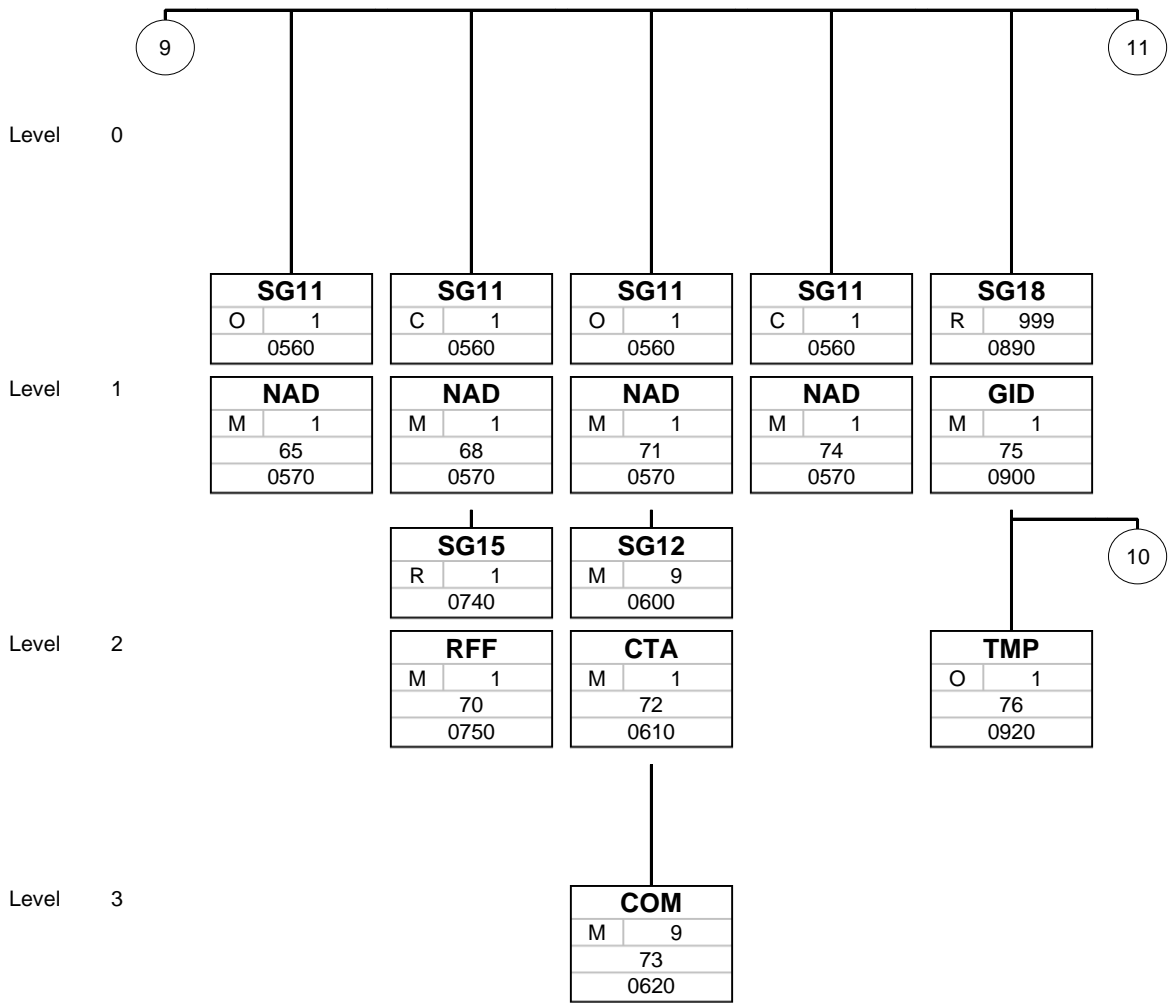


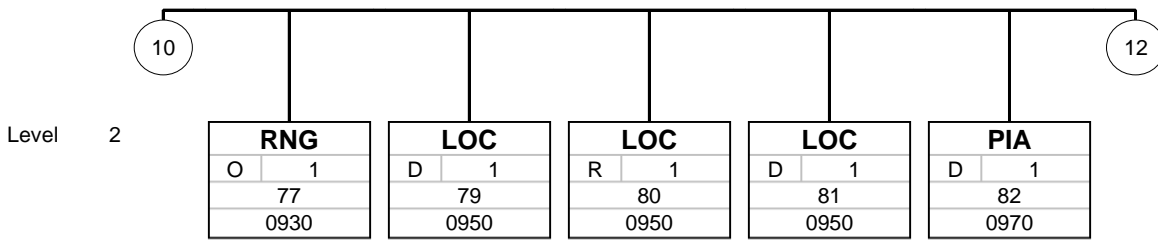


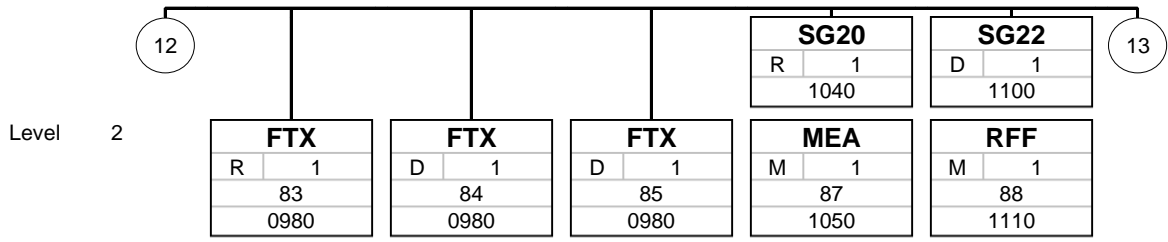


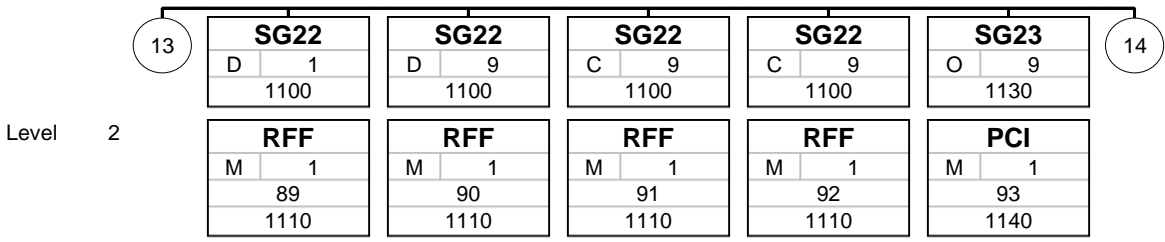


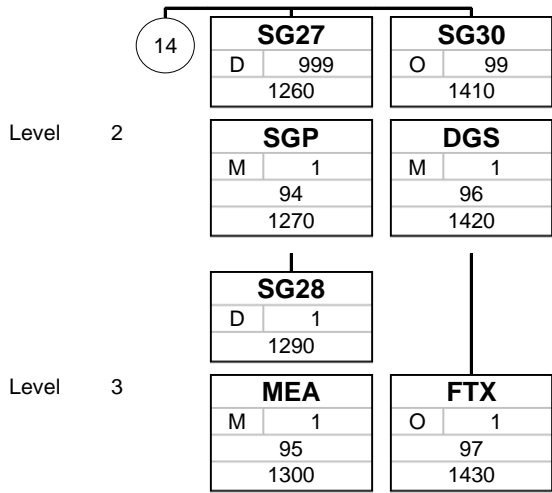

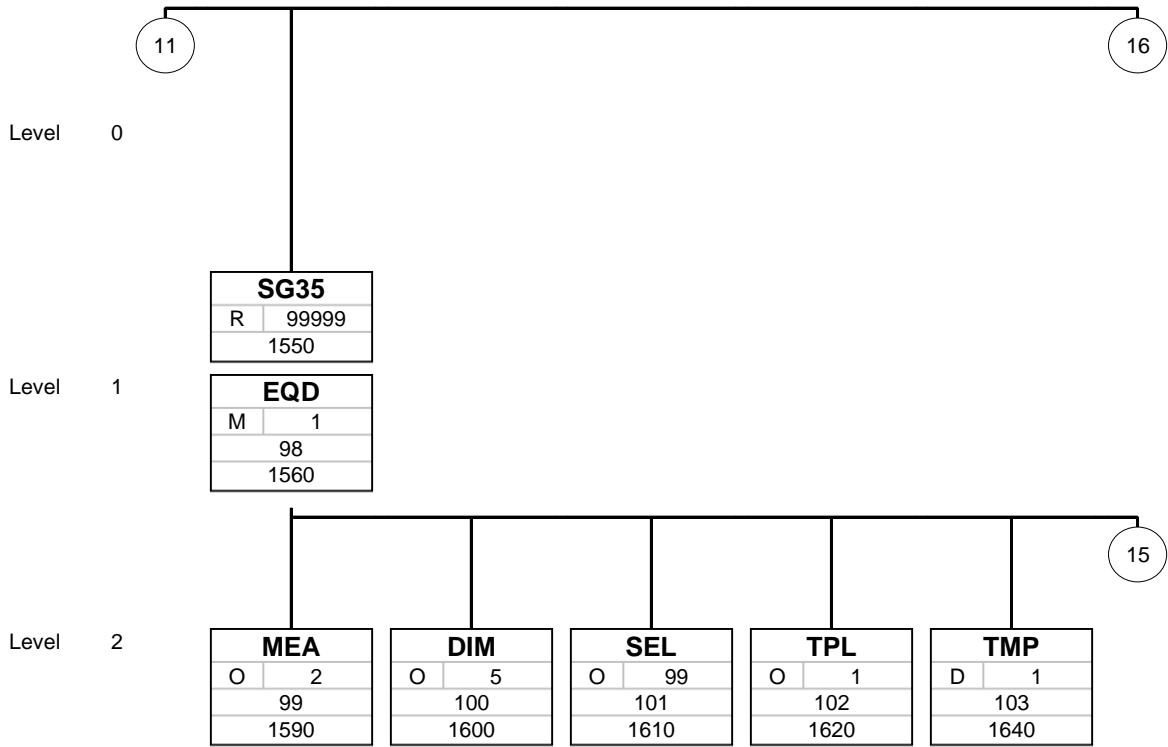

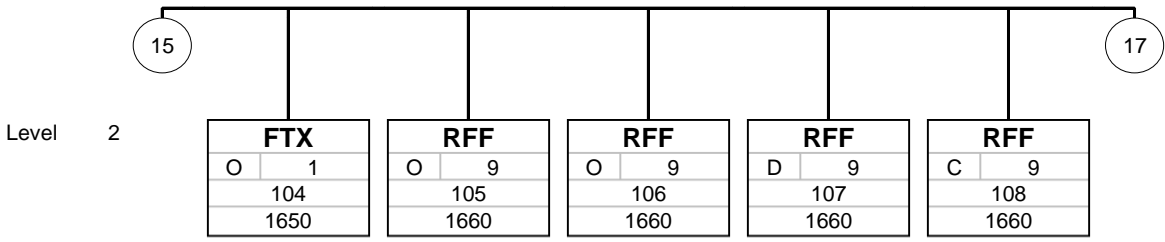

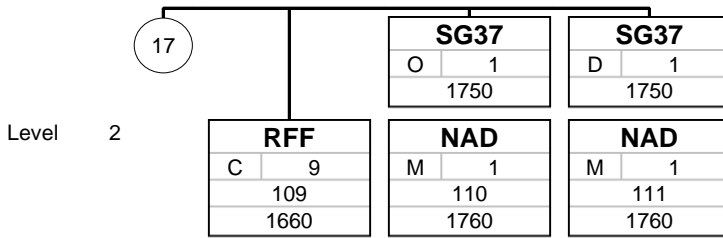

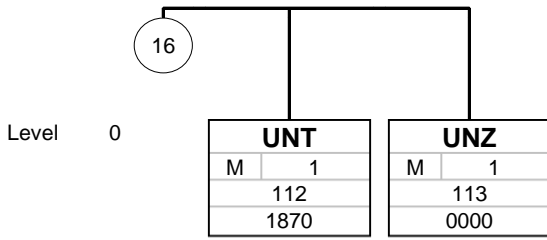

## 8 Segment description

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0000 1 **UNA** ( 1 ) C 1 0 Service string advice

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
UNA				
UNA1	Component data element separator	M an1	M an1	:
UNA2	Data element separator	M an1	M an1	+
UNA3	Decimal notation	M an1	M an1	.
UNA4	Release indicator	M an1	M an1	?
UNA5	Reserved for future use	M an1	M an1	
UNA6	Segment terminator	M an1	M an1	'

**Remark:**

**Example:**

UNA: + . ? '

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0000 2 **UNB** ( 1 ) M 1 0 Interchange header

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
UNB				
S001	Syntax identifier	M	M	
0001	Syntax identifier	M a4	M a4	
0002	Syntax version number	M n1	M n1	
S002	Interchange sender	M	M	
0004	Sender identification	M an..35	M an..35	DAKOSY Participant Code of the sending party
S003	Interchange recipient	M	M	
0010	Recipient identification	M an..35	M an..35	Please use DAKOSY's participant code in order to address the corresponding system in Hamburg (DAKOSY) or Bremen (dbh) <b>BIP Bremer Import Platform (dbh)</b> <b>IMP Import Message Platform (DAKOSY)</b>
S004	Date/time of preparation	M	M	
0017	Date of preparation	M n6	M n6	
0019	Time of preparation	M n4	M n4	
0020	Interchange control reference	M an..14	M an..14	A unique reference number identifying this EDIFACT interchange.
S005	Recipient's reference, password	C	N	
0022	Recipient's reference/password	M an..14	N	Not used
0026	Application reference	C an..14	N	Not used
0029	Processing priority code	C a1	N	Not used
0031	Acknowledgement request	C n1	N	Not used
0032	Communications agreement ID	C an..35	N	Not used
0035	Test indicator	C n1	C n1	Test indicator. If this field is submitted and has a value '1', the message will be treated as a test message. <b>1 Interchange is a test</b>

**Remark:**

**Example:**

UNB+UNOC:3+CARR+IMP+140124:1707+20240123100000+++++1'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0010 3 **UNH** ( 1 ) M 1 0 Message header

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
UNH				
0062	Message reference number	M an..14	M an..14	Unique technical reference identifying this EDIFACT message
S009	Message identifier	M	M	
0065	Message type	M an..6	M an..6	<b>IFTMCS Instruction contract status message</b>
0052	Message version number	M an..3	M an..3	<b>D Draft version/UN/EDIFACT Directory</b>
0054	Message release number	M an..3	M an..3	<b>00B Release 2000 - B</b>
0051	Controlling agency	M an..2	M an..2	<b>UN UN/CEFACT</b>
0057	Association assigned code	C an..6	R an..6	<b>IMP10 Import Message Platform</b> <b>IMP20 IMP - Export Manifest</b> <b>IMP30 Feeder shunting (Hamburg only)</b>

**Remark:**

**Example:**

UNH+20100122171055+IFTMCS:D:00B:UN:IMP10'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0020 4 **BGM ( 1 )** M 1 0 **Beginning of message**

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
BGM				
C002	Document/message name	C	R	
1001	Document name code	C an..3	R an..3	<b>707 Bill of lading copy</b>
C106	Document/message identification	C	R	
1004	Document identifier	C an..35	R an..35	
1225	Message function code	C an..3	R an..3	<b>9 Original 5 Replace / Update</b>

**Remark:**

**Example:**

BGM+707+201001221234+9'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0050 5 **DTM** ( 1 ) R 1 1 Message Creation Date

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	<b>137 Document/message date/time</b>
2380	Date or time or period value	C an..35	R an..35	Message creation date <b>Field (EXS):</b> <a href="#">Declaration Date</a>
2379	Date or time or period format code	C an..3	R an..3	<b>203 CCYYMMDDHHMM</b>

**Remark:**

**Example:**

DTM+137:202401051200:203'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0060 6 **TSR** ( 1 ) D 1 1 **Transport service requirements**

**Remark:** Mandatory in case of partload containers (LCL)

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
TSR				
C536	Contract and carriage condition	C	R	
4065	Contract and carriage condition code	M an..3	M an..3	<b>27 Door-to-door</b> <b>28 Door-to-pier</b> <b>29 Pier-to-door</b> <b>30 Pier-to-pier</b> Accd. to EDIFACT this value must be filled in if a TSR segment is sent. However, the contents are currently not evaluated, so one might simply send "00".
C233	Service	C	R	
7273	Service requirement code	M an..3	M an..3	<b>2 Full loads</b> <b>3 Less than full loads</b>

**Remark:**

**Example:**

TSR+27+2'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0090 7 **FTX** ( 1 ) C 1 1 **Information about a previous Entry Summary Declaration**

**Remark:** This segment can only be used with ICS1 and will be removed in later versions. The usage of RFF+AEI is recommended instead

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
FTX				
4451	Text subject code qualifier	M an..3	M an..3	<b>ENS</b>
4453	Free text function code	C an..3	N	Not used
C107	Text reference	C	R	
4441	Free text value code	M an..17	M an..17	<b>ENS</b> ENS data has been submitted using a ENS declaration (provide MRN in first element 4440) <b>SN</b> ENS data has been submitted using a shipment notification (provide MRN in first element 4440) <b>NEX</b> ENS data has not been submitted, since it was not required <b>OTH</b> ENS data has been submitted in a non-standard way (due to a system outage; provide MRN in first element 4440, further description in futher elements 4440)
C108	Text literal	C	D	
4440	Free text value	M an..512	M an..18	<b>Field (ZAPP):</b> <a href="#">Customs Reference</a> <b>Remark (ZAPP):</b> <a href="#">See code description for data element 4441</a> <b>Field (SumA):</b> <a href="#">MRN from ENS Declaration (Previous Customs Reference)</a>
4440	Free text value	C an..512	D an..256	<b>Field (ZAPP):</b> <a href="#">Description of special procedure</a> <b>Remark (ZAPP):</b> <a href="#">See code description for data element 4441</a>

**Remark:**

**Example:**

FTX+ENS++ENS+10DE321012345678I8:X'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0100 8 **CNT** ( 1 ) C 1 1 **Total Gross Weight**

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
CNT				
C270	Control	M	M	
6069	Control total type code qualifier	M an..3	M an..3	<b>7 Total gross weight</b>
6066	Control total value	M n..18	M n..14	Total Gross Weight of this shipment (14,3)
6411	Measurement unit code	C an..3	R an..3	<b>KGM kilogram</b>

**Remark:**

**Example:**

CNT+7:10259.220:KGM'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0100 9 **CNT** ( 2 ) C 1 1 Total number of containers

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
CNT				
C270	Control	M	M	
6069	Control total type code qualifier	M an..3	M an..3	<b>16 Total number of equipment</b>
6066	Control total value	M n..18	M n..18	<b>Field (SumA):</b> Total no. of containers <b>Remark (SumA):</b> Max. 4 digits, optional field Total no. of containers

**Remark:**

**Example:**

CNT+16:9'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0100 10 **CNT** ( 3 ) C 1 1 **Total Number of Pieces**

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
CNT				
C270	Control	M	M	
6069	Control total type code qualifier	M an..3	M an..3	<b>11 Total number of packages</b>
6066	Control total value	M n..18	M n..18	Total count of pieces in this shipment <b>Field (EXS):</b> <a href="#">Total Number of Packages</a>

**Remark:**

**Example:**

CNT+11:15'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0100 11 **CNT** ( 4 ) C 1 1 **Number of Positions**

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
CNT				
C270	Control	M	M	
6069	Control total type code qualifier	M an..3	M an..3	<b>2 Number of line items in message</b>
6066	Control total value	M n..18	M n..18	Each occurrence of segment group GID counts as a position <b>Field (ZAPP):</b> <a href="#">Number of Positions</a> <b>Field (EXS):</b> <a href="#">Number of Positions</a>

**Remark:**

**Example:**

CNT+2:9'

Counte	No	Name	St	MaxOcc	Level	Label
0120		<b>SG1</b> ( 1 )	O	1	1	<b>LOC</b>
0130	12	<b>LOC</b> ( 1 )	M	1	1	<b>Place/location identification</b>

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
LOC				
3227	Location function code qualifier	M an..3	M an..3	<b>91 Place of document issue</b>
C517	Location identification	C	R	
3225	Location name code	C an..25	D an..25	Either location name code or or location name can be specified
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	N	Not used
3224	Location name	C an..256	D an..256	

**Remark:**

**Example:**

LOC+91+:::HONG KONG'

Counte	No	Name	St	MaxOcc	Level	Label
	0180	<b>SG3</b> ( 1 )	R	1	1	B/L Number (Commercial Reference Number)
	0190 13	<b>RFF</b> ( 1 )	M	1	1	B/L Number (Commercial Reference Number)

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>BM Bill of lading number</b>
1154	Reference identifier	C an..70	R an..17	<b>Field (SumA):</b> <a href="#">Reference Number</a> B/L Number <b>Field (ZAPP):</b> <a href="#">Forwarders Reference</a> <b>Field (EXS):</b> <a href="#">Commercial Reference Number AND Local Reference Number</a>

**Remark:**

**Example:**

RFF+BM:HJSC1234740'

Counte	No	Name	St	MaxOcc	Level	Label
0180		<b>SG3</b> ( 2 )	C	1	1	Release order reference
0190	14	<b>RFF</b> ( 1 )	M	1	1	Reference

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>ATY Transport equipment release order reference</b>
1154	Reference identifier	C an..70	R an..35	

**Remark:**

**Example:**

RFF+ATY: 65544 '

Counte	No	Name	St	MaxOcc	Level	Label
0180		<b>SG3</b> ( 2 )	C	1	1	Release order reference
0200	15	<b>DTM</b> ( 1 )	C	1	2	Date of expiry

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	<b>36 Expiry date</b>
2380	Date or time or period value	C an..35	R an..35	
2379	Date or time or period format code	C an..3	R an..3	<b>102 CCYYMMDD</b>

**Remark:**

**Example:**

DTM+36:20210926:102'

Counte	No	Name	St	MaxOcc	Level	Label
0180		<b>SG3</b> ( 3 )	O	1	1	Forwarder's Reference
0190	16	<b>RFF</b> ( 1 )	M	1	1	Forwarders Reference

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>SRN Shipment reference number</b>
1154	Reference identifier	C an..70	R an..35	<b>Field (ZAPP):</b> Forwarders Reference <b>Remark (ZAPP):</b> If no forwarders reference is provided in RFF+SRN, the B/L number (RFF+BM) will be used for the forwarders reference instead

**Remark:**

**Example:**

RFF+SRN:DZ121005404'

Counte	No	Name	St	MaxOcc	Level	Label
0180		<b>SG3</b> ( 4 )	R	1	1	Transport Direction Indicator
0190	17	<b>RFF</b> ( 1 )	M	1	1	Transport Direction Indicator

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>DIR Transport Direction</b>
1154	Reference identifier	C an..70	R an..70	<b>I Import</b> <b>T Transit</b> <b>E Export</b> <b>TS Transshipment (Import)</b> <b>TSE Transshipment (Export)</b> <b>TC COPRAR Load Message</b> <b>UF Feeder shunting</b>
<p>This information is needed</p> <p>a) as an indicator for the usage of IFTMCS data with regards to IMP and/or ZAPP;</p> <p>b) for statistical purposes</p> <p>Please note, that the terms listed above are defined in this context as follows:</p> <p>* Transit: Goods, which remain on board.</p> <p>* Transshipment (Import): Goods, which are unloaded from one vessel and loaded onto another, final destination of the cargo is within the EU</p> <p>* Transshipment (Export): Goods, which are unloaded from one vessel and loaded onto another, final destination of the cargo is outside of the EU</p> <p>* Import: Goods, which are unloaded from a vessel. Overland transportation e.g. to Russia is understood as import, too.</p> <p>* Export: Goods which are loaded onto a vessel for export after they were transported to the seaport from the hinterland. The direction indicator "TC" may only be used in an feeder carriers export manifest. If the transport direction is set to "TC", the manifest data are processed as if a COPRAR Load message was sent in the transshipment process, i. e. goods description and address data are take from the import manifest.</p> <p>The transport direction "TC" has no impact on the port fee declaration, where the export manifest will be processed "as it is".</p>				

**Remark:**

**Example:**

RFF+DIR:TS'

Counte	No	Name	St	MaxOcc	Level	Label
0180		<b>SG3</b> ( 5 )	O	1	1	Indicator for generation of summary declaration of temporary storage
0190	18	<b>RFF</b> ( 1 )	M	1	1	Indicator for generation of summary declaration of temporary storage

**Remark:** Segment RFF+BGM might be used to specify whether the summary declaration of temporary storage ("SumA") should be triggered by the IMP itself. If the segment is not provided, IMP will not trigger the SumA.

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>BGM</b>
1154	Reference identifier	C an..70	R an..70	Code indicating the specific usage of the manifest information. Code 929 indicates, that the IMP should trigger the summary declaration of temporary storage ("SumA"). Code 707 indicates that the SumA will be generated/triggered by another party (see description of following element). Code 929 is not allowed for transit or export shipments (see RFF+DIR).  Usage of code 355 in the IMP: No matter which rules apply in the transshipment process, you can force the system to generate an exit summary declaration (EXS) and the subsequent S-number. <b>929 Generate SumA</b> <b>707 Use for IMP only</b> <b>401 BHT Transshipment Order (only for PoD Bremen/Bremerhaven)</b> <b>355 Force EXS generation (IMP: allowed only in export manifest)</b>

**Remark:**

**Example:**

RFF+BGM: 707 '

RFF+BGM: 929 '

Counte	No	Name	St	MaxOcc	Level	Label
0180		<b>SG3</b> ( 6 )	O	1	1	RFF
0190	19	<b>RFF</b> ( 1 )	M	1	1	<b>Indicator for generation of Re-Export Notification/EXS</b>

**Remark:** Used only in BIP: Segment RFF+CUS must be used to specify whether a re-export notification or EXS should be triggered automatically. If the segment is not provided, no message will be generated.  
In the IMP it depends on general configuration, if a declaration will be generated

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>CUS Customs Message Indicator</b>
1154	Reference identifier	C an..70	R an..70	<b>1 Generate Re-Export Notification/EXS</b> <b>0 Do not generate Re-Export Notification/EXS</b> Code specifying whether to automatically generate a Re-Export Notification resp. Exit Summary Declaration to customs or not. Value '1' is allowed only in case of Transshipments or Export (see RFF+DIR). If segment RFF+CUS is not present, value '0' will be assumed.

**Remark:**

**Example:**

RFF+CUS:0'

Counte	No	Name	St	MaxOcc	Level	Label
0180		<b>SG3</b> ( 7 )	D	1	1	RFF
0190	20	<b>RFF</b> ( 1 )	M	1	1	Original Message Reference

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>ACW Reference number to previous message</b>
1154	Reference identifier	C an..70	R an..35	When sending updates, this field is meant to contain the local reference number (BGM Element 1004) of the original message

**Remark:**

**Example:**

RFF+ACW:123456'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0180		<b>SG3</b> ( 8 )	D	1	1	ID of previous customs declaration
------	--	------------------	---	---	---	------------------------------------

0190	21	<b>RFF</b> ( 1 )	M	1	1	ID of previous customs declaration
------	----	------------------	---	---	---	------------------------------------

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>MRN Mailing reference number</b> <b>AEI Registration number of previous Customs declaration</b> In order to harmonise the interface, the qualifier AEI has been introduced. AEI and MRN may be used synonymously. Since the qualifier "MRN" will be removed in later versions, the usage of "AEI" is recommended.
1154	Reference identifier	C an..70	R an..30	an..30, if previous document type = OESUMA, in all other cases an18 (MRN) Previous document number (MRN) or exemption
1156	Document line identifier	C an..6	N	Element not used on B/L level. Not used
4000	Reference version identifier	C an..35	D an..6	<b>ESUMA MRN of an Entry summary declaration</b> <b>OESUMA If ENS declaration has to be done, the reason for the exemption has to be entered.</b> <b>Previous document type</b> Other previous document types are only to be used on GID level

**Remark:**

This segment can be used only with ICS1. Information related to ICS2 has to be sent on GID level.

Mandatory for third country goods, where an ENS has been lodged.

Mandatory for third country goods, for which an ENS has been lodged.

Example: 1 Segments on Header- and GID level

SG3 (B/L level) RFF+AEI:10DE321012345678I8'

SG22 (GID) GID+1...

RFF+AEI::001'

....

GID+2..

RFF+AEI::002'

Example 2: Segments only on GID level (recommended)

SG3 (B/L level) -

SG22 (GID) GID+1...

RFF+AEI:10DE321012345678I8:001'

....

GID+2..

RFF+AEI:10DE321012345678I8:003'

**Example:**

RFF+AEI:20DE321012345678I8::ESUMA'

Counte	No	Name	St	MaxOcc	Level	Label
0180		<b>SG3</b> ( 9 )	D	1	1	RFF
0190	22	<b>RFF</b> ( 1 )	M	1	1	Customs Reference to summary declaration

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>XC Cargo control number</b>
1154	Reference identifier	C an..70	R an..21	<b>Field (SumA):</b> <a href="#">ID Reg-No ATLAS (SumA)</a> <b>Remark (SumA):</b> ATB Number. Mandatory when updating or confirming an existing preliminary/partially confirmed SumA.  <b>Field (ZAPP):</b> <a href="#">Registration number of previous summary declaration of temporary storage</a> <b>Remark (ZAPP):</b> If no registration number is provided, this will be interpreted as "A summary declaration of temporary storage was not required"

**Remark:**

**Example:**

RFF+XC:ATB120005410540540'

Counte	No	Name	St	MaxOcc	Level	Label
0180		<b>SG3</b> ( 1 ) 3	C	1	1	Job order code oncarriage transport
0190	23	<b>RFF</b> ( 1 )	M	1	1	Reference

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>030 Generate messages regarding the on-carriage</b>
1154	Reference identifier	C an..70	R an..17	Generate Import Operation Instruction - If element 1154 of RFF+IOI is set to 1, IMP shall generate an Import Operation Instruction on behalf of the Carrier (i.e. the Carrier will act in the role of the Forwarder for this IOI). <b>IOI Generate Import Operation Instruction</b> <b>TA Generate Transport Order</b> <b>ALL Generate all messages (Import Operation Instruction and Transportorder)</b>

Remark:

Example:

RFF+030:IOI'

Counte	No	Name	St	MaxOcc	Level	Label
	0460	<b>SG8</b> ( 1 )	R	1	1	<b>TDT-SG9-SG10</b>
	0470	<b>TDT</b> ( 1 )	M	1	1	<b>Vessel Information</b>

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
TDT				
8051	Transport stage code qualifier	M an..3	M an..3	<b>20 Main-carriage transport</b>
8028	Means of transport journey identifier	C an..17	R an..17	Vessel Voyage Number
C220	Mode of transport	C	C	
8067	Transport mode name code	C an..3	R an..3	<b>1 Maritime transport</b> <b>Field (SumA):</b> <a href="#">Mode of transport at border</a>
C228	Transport means	C	C	
8179	Transport means description code	C an..8	R an..8	<b>11 Ship</b> <b>Field (SumA):</b> <a href="#">Transport Means</a>
C040	Carrier	C	M	
3127	Carrier identifier	C an..17	R an..17	Carrier's SCAC Code
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	N	Not used
3128	Carrier name	C an..35	O an..35	Carrier's Name
8101	Transit direction indicator code	C an..3	N	Not used
C401	Excess transportation information	C	N	
8457	Excess transportation reason code	M an..3	M an..3	
C222	Transport identification	C	M	
8213	Transport means identification name identifier	C an..9	R an..9	IMO Number <b>Field (SumA):</b> <a href="#">Conveyance Reference</a>
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	N	Not used
8212	Transport means identification name	C an..35	R an..35	Vessel Name
8453	Transport means nationality code	C an..3	R an..3	Nationality of the vessel

**Remark:**

**Example:**

TDT+20+ABCD0021W+1+11+CARR:::CARRIER+++9999999:::VESSEL NAME:DE'

Counte	No	Name	St	MaxOcc	Level	Label
	0460	<b>SG8</b> ( 1 )	R	1	1	<b>TDT-SG9-SG10</b>
	0500	<b>SG9</b> ( 1 )	R	1	2	<b>Port of discharge</b>
	0510	<b>LOC</b> ( 1 )	M	1	2	<b>Place/location identification</b>

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
LOC				
3227	Location function code qualifier	M an..3	M an..3	<b>11 Place/port of discharge</b>
C517	Location identification	C	M	
3225	Location name code	C an..25	R a..5	Location code of port of discharge
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	N	Not used
3224	Location name	C an..256	R an..35	Name of port of discharge
C519	Related location one identification	C	D	
3223	First related location name code	C an..25	D an..25	Code of berth at discharge location. If the IFTMCS is used for the summary declaration of temporary storage the code of the discharge berth must be sent here. When using the IFTMCS as an Export Manifest this field is optional. The complete list of DAKOSY terminal codes for the use in IMP is available under: <a href="https://www.dakosy.de/en/applications-portal/dakosy-codes">https://www.dakosy.de/en/applications-portal/dakosy-codes</a> , e. g.: <b>BK9 HHLA Containerterminal Burchardkai</b> <b>CTA HHLA Containerterminal Altenwerder</b> <b>EUR Eurgate Containerterminal Hamburg</b> <b>OSW UNIKAI</b> <b>SWT C. Steinweg Südwest Terminal</b> <b>RHES Rhenu Midgard</b> <b>TCT HHLA Containerterminal Tollerort</b> If the receiving system in UNB is BIP, please use code from following list: <a href="http://kis.dbh.de/index.php?id=590">http://kis.dbh.de/index.php?id=590</a>
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	N	Not used
3222	First related location name	C an..70	O an..35	Name of the berth at the port of discharge
C553	Related location two identification	C	C	
3233	Second related location name code	C an..25	O a2	
5479	Relation code	C an..3	D an1	<b>J Port of Discharge is actual First Port of Entry</b> <b>N Löschhafen ist nicht die tatsächliche erste Eingangszollstelle in Europa.</b> Indicator used to specify, if the customs office where the entry summary declaration is being delivered (port of discharge), actually is the first customs office of entry or a following customs office.  The first customs office of entry, specified and declared (!) in LOC+41 is not relevant for the determination of the indicator. The customs office of entry, declared first, even remains unchanged in case of a change in rotation.  Two scenarios are possible:  1) The first port actually entered on the route is e.g. NLRMT

		Standard	Implementation	
Bez	Name	St Format	St Format	Usage / Comment
				LOC+11+DEHAM::HAMBURG+CTA:: ALTENWERDER+DE+N' synonymous with  LOC+11+DEHAM::HAMBURG+CTA:: ALTENWERDER+DE' . The omission of the element is being interpreted as 'N'.  2) After changing the route Hamburg is being entered as first Port in Europe, in other words, Hamburg is the actual (!) first customs office of entry.  LOC+11+DEHAM::HAMBURG+CTA:: ALTENWERDER+DE+J' <b>Indicator actual first customs office of entry</b>

**Remark:**

**Example:**

LOC+11+DEHAM::HAMBURG+CTA::ALTENWERDER+DE+N'

Counte	No	Name	St	MaxOcc	Level	Label
	0460	<b>SG8</b> ( 1 )	R	1	1	<b>TDT-SG9-SG10</b>
	0500	<b>SG9</b> ( 1 )	R	1	2	<b>Port of discharge</b>
	0520	<b>DTM</b> ( 1 )	D	1	3	<b>ETA at Port of Discharge</b>

**Remark:** This segment becomes mandatory when the IFTMCS is used for generating a summary declaration of temporary storage (SumA)  
**IMPORTANT:** In order for the terminals discharge report to be assigned to the manifest, the ETA must not deviate from the date of discharge more than 7 days. Only then will an early SumA be confirmed, and only then can a container go into custody!

For the customs processes it is absolutely necessary that the ETA is always up to date!

		Standard	Implementation	
Bez	Name	St Format	St Format	Usage / Comment
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	<b>132 Arrival date/time, estimated</b>
2380	Date or time or period value	C an..35	R an..35	<b>Field (SumA):</b> <a href="#">Date of presentation.</a> ETA Port of Discharge
2379	Date or time or period format code	C an..3	R an..3	<b>102 CCYYMMDD</b>

**Remark:**

**Example:**

DTM+132:20210125:102'

Counte	No	Name	St	MaxOcc	Level	Label
	0460	<b>SG8</b> ( 1 )	R	1	1	TDT-SG9-SG10
	0500	<b>SG9</b> ( 1 )	R	1	2	Port of discharge
	0520 27	<b>DTM</b> ( 2 )	O	1	3	Date/time/period

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	<b>133 Departure date/time, estimated</b>
2380	Date or time or period value	C an..35	R an..35	
2379	Date or time or period format code	C an..3	R an..3	<b>102 CCYYMMDD</b>

**Remark:**

**Example:**

DTM+133:20210127:102'

Counte	No	Name	St	MaxOcc	Level	Label
	0460	<b>SG8</b> ( 1 )	R	1	1	<b>TDT-SG9-SG10</b>
	0500	<b>SG9</b> ( 2 )	D	1	2	<b>Port of Loading</b>
	0510	<b>LOC</b> ( 1 )	M	1	2	<b>Place/location identification</b>

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
LOC				
3227	Location function code qualifier	M an..3	M an..3	<b>9 Place/port of loading</b>
C517	Location identification	C	M	
3225	Location name code	C an..25	R a..5	
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	N	Not used
3224	Location name	C an..256	O an..35	
C519	Related location one identification	C	D	
3223	First related location name code	C an..25	D an..25	Code of berth at loading location. If the IFTMCS is used as an export manifest within IMP (RFF+DIR = 'TSE' or 'E'), the loading berth must be given here. The complete list of DAKOSY terminal codes for the use in IMP is available under: <a href="https://www.dakosy.de/en/applications-portal/dakosy-codes">https://www.dakosy.de/en/applications-portal/dakosy-codes</a> , e. g.: <b>BK9 HHLA Containerterminal Burchardkai</b> <b>CTA HHLA Containerterminal Altenwerder</b> <b>EUR Eurgate Containerterminal Hamburg</b> <b>OSW UNIKAI</b> <b>RHES Rhenus Midgard</b> <b>SWT C. Steinweg Südwest Terminal</b> <b>TCT HHLA Containerterminal Tollerort</b> If the receiving system in UNB is BIP, please use code from following list: <a href="http://kis.dbh.de/index.php?id=590">http://kis.dbh.de/index.php?id=590</a>
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	N	Not used
3222	First related location name	C an..70	O an..35	Name of the berth at the port of loading
C553	Related location two identification	C	C	
3233	Second related location name code	C an..25	D a2	<b>Field (SumA):</b> <a href="#">Means of transport (Overland) and/or country of origin/of export</a>

Remark:

Example:

LOC+9+CNHKG:::HONG KONG++CN'

Counte	No	Name	St	MaxOcc	Level	Label
0460		<b>SG8</b> ( 1 )	R	1	1	TDT-SG9-SG10
0500		<b>SG9</b> ( 2 )	D	1	2	Port of Loading
0520	29	<b>DTM</b> ( 1 )	D	1	3	Date/time/period

**Remark:** This segment becomes mandatory when the IFTMCS is used as an export manifest with IMP

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	<b>133 Departure date/time, estimated</b>
2380	Date or time or period value	C an..35	R an..35	
2379	Date or time or period format code	C an..3	R an..3	<b>102 CCYYMMDD</b>

**Remark:**

**Example:**

DTM+133:20210127:102'

Counte	No	Name	St	MaxOcc	Level	Label
	0460	<b>SG8</b> ( 1 )	R	1	1	TDT-SG9-SG10
	0500	<b>SG9</b> ( 2 )	D	1	2	Port of Loading
	0520	<b>DTM</b> ( 2 )	O	1	3	Date/time/period

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	<b>186 Departure date/time, actual</b>
2380	Date or time or period value	C an..35	R an..35	
2379	Date or time or period format code	C an..3	R an..3	<b>102 CCYYMMDD</b>

**Remark:**

**Example:**

DTM+186:20210201:102'

Counte	No	Name	St	MaxOcc	Level	Label
0460		<b>SG8</b> ( 1 )	R	1	1	TDT-SG9-SG10
0500		<b>SG9</b> ( 3 )	O	1	2	Final port of discharge
0510	31	<b>LOC</b> ( 1 )	M	1	2	Place/location identification

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
LOC				
3227	Location function code qualifier	M an..3	M an..3	<b>170 Final port of discharge</b>
C517	Location identification	C	M	
3225	Location name code	C an..25	R a..5	Location Code of origin (with Qualifier 82) resp. fnal destination (with Qualifier 170)
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	N	Not used
3224	Location name	C an..256	R an..35	Name of port of origin (with Qualifier 82) resp. fnal destination (with Qualifier 170)

**Remark:**

**Example:**

LOC+170+DEDRS:::DRESDEN'

Counte	No	Name	St	MaxOcc	Level	Label
0460		<b>SG8</b> ( 1 )	R	1	1	TDT-SG9-SG10
0500		<b>SG9</b> ( 6 )	D	1	2	Information about the first customs office at entry
0510	32	<b>LOC</b> ( 1 )	M	1	2	Declared first customs office at entry

**Remark:** First customs office of entry according to entry summary declaration in ICS (ENS, ESumA). The declared customs office is a technical key and does not change even if the rotation changes.

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
LOC				
3227	Location function code qualifier	M an..3	M an..3	<b>41 Customs office of entry</b>
C517	Location identification	C	M	
3225	Location name code	C an..25	R an8	<b>Field (SumA):</b> <a href="#">First customs office of entry</a> List of customs office codes available at: <a href="http://ec.europa.eu/taxation_customs/dds/csr/home_en.htm">http://ec.europa.eu/taxation_customs/dds/csr/home_en.htm</a>
C519	Related location one identification	C	N	
3223	First related location name code	C an..25	C an..25	
C553	Related location two identification	C	N	
3233	Second related location name code	C an..25	C an..25	
5479	Relation code	C an..3	R an..3	<b>0</b>

**Remark:**

**Example:**

LOC+41+FR001234+++0'

Counte	No	Name	St	MaxOcc	Level	Label
0460		<b>SG8</b> ( 1 )	R	1	1	TDT-SG9-SG10
0500		<b>SG9</b> ( 6 )	D	1	2	Information about the first customs office at entry
0520	33	<b>DTM</b> ( 1 )	R	1	3	ETA according to ENS declaration

**Remark:** Also called static or frozen ETA. This date must match with the ETA in the ESumA (ENS). The ETA in the ESumA does not change, even in case of delays or changes of the rotation.

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	<b>132 Arrival date/time, estimated</b>
2380	Date or time or period value	C an..35	R an..35	
2379	Date or time or period format code	C an..3	R an..3	<b>203 CCYYMMDDHHMM</b>

**Remark:**

**Example:**

DTM+132:202401241355:203'

Counte	No	Name	St	MaxOcc	Level	Label
0460		<b>SG8</b> ( 1 )	R	1	1	TDT-SG9-SG10
0530		<b>SG10</b> ( 1 )	R	1	2	RFF
0540	34	<b>RFF</b> ( 1 )	M	1	2	Vessel Call Sign

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>VM Vessel identification</b>
1154	Reference identifier	C an..70	R an..7	Call Sign of the vessel

**Remark:**

**Example:**

RFF+VM:CG9TH'

Counte	No	Name	St	MaxOcc	Level	Label
0460		<b>SG8</b> ( 1 )	R	1	1	TDT-SG9-SG10
0530		<b>SG10</b> ( 2 )	O	1	2	RFF
0540	35	<b>RFF</b> ( 1 )	M	1	2	DAKOSY- or SIS Voyage Number

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>SIS SIS Voyage Reference</b>
1154	Reference identifier	C an..70	R an..70	<b>DAK DAKOSY Voyage Reference</b>

**Remark:**

**Example:**

RFF+DAK:DKL8796'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0460		<b>SG8</b> ( 2 )	O	1	1	On-Carriage
------	--	------------------	---	---	---	-------------

0470	36	<b>TDT</b> ( 1 )	M	1	1	Information about On-Carriage
------	----	------------------	---	---	---	-------------------------------

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
TDT				
8051	Transport stage code qualifier	M an..3	M an..3	<b>30 On-carriage transport</b>
8028	Means of transport journey identifier	C an..17	N	Not used
C220	Mode of transport	C	M	
8067	Transport mode name code	C an..3	R an..3	<b>1 Maritime transport 2 Rail transport 3 Road transport 8 Inland water transport</b>
C228	Transport means	C	N	
8179	Transport means description code	C an..8	N	Not used
C040	Carrier	C	C	
3127	Carrier identifier	C an..17	O an..17	SCAC Code of On Carriage Operator
8101	Transit direction indicator code	C an..3	N	Not used
C401	Excess transportation information	C	N	
8457	Excess transportation reason code	M an..3	N	Not used
C222	Transport identification	C	C	
8213	Transport means identification name identifier	C an..9	N	Not used
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	N	Not used
8212	Transport means identification name	C an..35	R an..35	<b>Field (ZAPP):</b> <a href="#">Vessel Name</a> Vessel Name (On Carriage) <b>Status (TA)</b> <a href="#">D</a> <b>Remark (TA)</b> <a href="#">Required if on-carriage is managed by vessel</a>

**Remark:**

**Example:**

TDT+30++1++DAKO+++::MS LUISE'

Counte	No	Name	St	MaxOcc	Level	Label
	0460	<b>SG8</b> ( 2 )	O	1	1	On-Carriage
	0500	<b>SG9</b> ( 1 )	R	1	2	LOC-DTM
	0510	<b>LOC</b> ( 1 )	M	1	2	Place/location identification

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
LOC				
3227	Location function code qualifier	M an..3	M an..3	<b>170 Final port of discharge</b>
C517	Location identification	C	M	
3225	Location name code	C an..25	O an..25	<b>Field (ZAPP):</b> <a href="#">Port of Discharge (UN LoCode)</a>
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	N	Not used
3224	Location name	C an..256	R an..256	<b>Field (ZAPP):</b> <a href="#">Port of Discharge (Name)</a> <b>Remark (ZAPP):</b> While the name of the port of discharge must be provided, the UN Location Code is optional
C519	Related location one identification	C	N	
3223	First related location name code	C an..25	N	Not used
C553	Related location two identification	C	C	
3233	Second related location name code	C an..25	D an..25	<b>Field (EXS):</b> <a href="#">Itinerary (Port of Discharge)</a> Mandatory when using the IFTMCS for Re-Export Notification or EXS (RFF+CUS = '1')

**Remark:**

**Example:**

LOC+170+NOOSL:::OSLO++NO'

Counte	No	Name	St	MaxOcc	Level	Label
	0460	<b>SG8</b> ( 2 )	O	1	1	On-Carriage
	0500	<b>SG9</b> ( 1 )	R	1	2	LOC-DTM
	0520	<b>DTM</b> ( 1 )	D	1	3	Date/time/period

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	<b>133</b> Departure date/time, estimated
2380	Date or time or period value	C an..35	R an..35	Field (ZAPP): <a href="#">Departure Date</a> Remark (ZAPP): <a href="#">This is the date of the departure FROM HAMBURG to the port provided in LOC+7</a> Field (EXS): <a href="#">Departure Date</a>
2379	Date or time or period format code	C an..3	R an..3	<b>203</b> CCYYMMDDHHMM <b>102</b> CCYYMMDD

**Remark:**

**Example:**

DTM+133:202110250956:203'

Counte	No	Name	St	MaxOcc	Level	Label
0460		<b>SG8</b> ( 2 )	O	1	1	On-Carriage
0500		<b>SG9</b> ( 1 )	R	1	2	LOC-DTM
0520	39	<b>DTM</b> ( 2 )	C	1	3	Pickup Date

**Remark:** date for the scheduled pickup from the terminal

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	
2380	Date or time or period value	C an..35	R an..35	
2379	Date or time or period format code	C an..3	R an..3	<b>102 CCYYMMDD</b>

**Remark:**

**Example:**

DTM+1:20231021:102'

Counte	No	Name	St	MaxOcc	Level	Label
0460		<b>SG8</b> ( 2 )	O	1	1	On-Carriage
0530		<b>SG10</b> ( 1 )	O	1	2	DAKOSY- or SIS Voyage Number
0540	40	<b>RFF</b> ( 1 )	M	1	2	DAKOSY- or SIS Voyage Number

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>SIS SIS Voyage Reference</b>
1154	Reference identifier	C an..70	R an..70	<b>DAK DAKOSY Voyage Reference</b>

**Remark:**

**Example:**

RFF+DAK:DKL8790'

Counte	No	Name	St	MaxOcc	Level	Label
0560		SG11 ( 1 )	C	1	1	NAD-SG12-SG15
0570	41	NAD ( 1 )	M	1	1	Information about the presenter / the company lodging the declaration

Remark: Message Sender - equal to the company lodging a declaration

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
NAD				
3035	Party function code qualifier	M an..3	M an..3	<b>MS Document/message issuer/sender</b>
C082	Party identification details	C	C	
3039	Party identifier	M an..35	M an..17	<b>Field (SumA):</b> Presenter's TIN <b>Remark (SumA):</b> If the message sender does have a German TIN/EORI, it should be filled in here. In this case, the message senders address information will be ignored.
C058	Name and address	C	C	
3124	Name and address description	M an..35	M an..17	<b>EORI</b> <b>Field (SumA):</b> Presenter's EORI <b>Remark (SumA):</b> If the message sender does have a German EORI, it should be filled in here. In this case, the message senders address information will be ignored.
3124	Name and address description	C an..35	D n4	Office number (0000 - 9999). Default value is 0000, if the element is missing.
C080	Party name	C	D	
3036	Party name	M an..35	M an..35	<b>Field (SumA):</b> Company Name (Presenter) Part 1 <b>Field (ZAPP):</b> Company which files the declaration (Company Name, Part 1) Mandatory if no TIN is specified in this segments element 3039
3036	Party name	C an..35	C an..35	<b>Field (SumA):</b> Company Name (Presenter) Part 2 <b>Field (ZAPP):</b> Company which files the declaration (Company Name, Part 2)
3036	Party name	C an..35	C an..35	<b>Field (SumA):</b> Company Name (Presenter) Part 3 <b>Field (ZAPP):</b> Company which files the declaration (Company Name, Part 3)
C059	Street	C	C	
3042	Street and number or post office box identifier	M an..35	M an..35	<b>Field (SumA):</b> Street and Number (Presenter) <b>Field (ZAPP):</b> Company which files the declaration (Street) Mandatory if no TIN is specified in this segments element 3039
3042	Street and number or post office box identifier	C an..35	C an..35	<b>Field (SumA):</b> City District (Presenter)
3164	City name	C an..35	D an..35	<b>Field in SumA:</b> City (Presenter) <b>Field in ZAPP:</b> Company which files the declaration (City) Mandatory if no TIN is specified in this segments element 3039
C819	Country sub-entity details	C	N	
3229	Country sub-entity name code	C an..9	C an..9	
3251	Postal identification code	C an..17	D an..17	<b>Field in SumA:</b> ZIP Code (Presenter) <b>Remark SumA:</b> Mandatory if no TIN is specified Mandatory if no TIN is specified in this segments element 3039 and country code (element 3207) is 'DE'
3207	Country name code	C an..3	D an..3	<b>Field in SumA:</b> Country/Country Code (Presenter) <b>Field in ZAPP:</b> Company which files the declaration (Country) Mandatory if no TIN is specified in this segments element

		Standard	Implementation	
Bez	Name	St Format	St Format	Usage / Comment
				3039

**Remark:**

**Example:**

NAD+MS++DE870515478:1111+PRESENTER:COMPANY:PC+ABC-STRASSE 32:ORTSTEIL+GESTELLSTADT++12345+DE'

Counte	No	Name	St	MaxOcc	Level	Label
	0560	<b>SG11</b> ( 1 )	C	1	1	NAD-SG12-SG15
	0600	<b>SG12</b> ( 1 )	C	1	2	CTA-COM
	0610 42	<b>CTA</b> ( 1 )	M	1	2	Contact information

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
CTA				
3139	Contact function code	C an..3	M an..3	<b>IC Information contact</b>
C056	Department or employee details	C	C	
3413	Department or employee name code	C an..17	N	Not used
3412	Department or employee name	C an..35	M an..35	

**Remark:**

**Example:**

CTA+IC+:Mr. Mueller'

Counte	No	Name	St	MaxOcc	Level	Label
	0560	<b>SG11</b> ( 1 )	C	1	1	<b>NAD-SG12-SG15</b>
	0600	<b>SG12</b> ( 1 )	C	1	2	<b>CTA-COM</b>
	0620 43	<b>COM</b> ( 1 )	M	2	3	<b>Communication contact</b>

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	
3155	Communication address code qualifier	M an..3	M an..3	<b>TE Telephone</b> <b>EM Electronic mail</b>

Remark:

Example:

COM+040370030:TE'

Counte	No	Name	St	MaxOcc	Level	Label
0560		<b>SG11</b> ( 1 )	C	1	1	NAD-SG12-SG15
0600		<b>SG12</b> ( 1 )	C	1	2	CTA-COM
0620	44	<b>COM</b> ( 2 )	C	1	3	Fax

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	
3155	Communication address code qualifier	M an..3	M an..3	<b>FX Telefax</b>

**Remark:**

**Example:**

COM+040370031:FX'

Counte	No	Name	St	MaxOcc	Level	Label
0560		<b>SG11</b> ( 2 )	O	1	1	Carrier, Container operator
0570	45	<b>NAD</b> ( 1 )	M	1	1	Information about the carrier

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
NAD				
3035	Party function code qualifier	M an..3	M an..3	<b>CG Carrier's agent</b>
C082	Party identification details	C	N	
3039	Party identifier	M an..35	M an..35	
C058	Name and address	C	N	
3124	Name and address description	M an..35	N	Not used
C080	Party name	C	C	
3036	Party name	M an..35	R an..35	
C059	Street	C	C	
3042	Street and number or post office box identifier	M an..35	R an..35	
3164	City name	C an..35	R an..35	
C819	Country sub-entity details	C	N	
3229	Country sub-entity name code	C an..9	N	Not used
3251	Postal identification code	C an..17	O an..17	
3207	Country name code	C an..3	O an..3	

**Remark:**

**Example:**

NAD+CG+++CARRIER COMPANY+WINROAD 21+HONGKONG++123450+CN'

Counte	No	Name	St	MaxOcc	Level	Label
0560		<b>SG11</b> ( 2 )	O	1	1	Carrier, Container operator
0600		<b>SG12</b> ( 1 )	C	1	2	CTA-COM
0610	46	<b>CTA</b> ( 1 )	M	1	2	Contact information

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
CTA				
3139	Contact function code	C an..3	M an..3	<b>IC Information contact</b>
C056	Department or employee details	C	C	
3413	Department or employee name code	C an..17	N	Not used
3412	Department or employee name	C an..35	M an..35	Contact person or department at the carrier resp. the carriers agent.

**Remark:**

**Example:**

CTA+IC+:X'

Counte	No	Name	St	MaxOcc	Level	Label
0560		<b>SG11</b> ( 2 )	O	1	1	Carrier, Container operator
0600		<b>SG12</b> ( 1 )	C	1	2	CTA-COM
0620	47	<b>COM</b> ( 1 )	C	9	3	Communication contact

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	
3155	Communication address code qualifier	M an..3	M an..3	<b>EM</b> Electronic mail <b>FX</b> Telefax <b>TE</b> Telephone

**Remark:**

**Example:**

COM+(0123) 456-78:TE'

Counte	No	Name	St	MaxOcc	Level	Label
0560		<b>SG11</b> ( 3 )	O	1	1	Shipper
0570	48	<b>NAD</b> ( 1 )	M	1	1	Information about the shipper/consignor

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
NAD				
3035	Party function code qualifier	M an..3	M an..3	<b>CZ Consignor</b>
C082	Party identification details	C	N	
3039	Party identifier	M an..35	N	Not used
C058	Name and address	C	C	
3124	Name and address description	M an..35	M an..17	<b>EORI</b>
3124	Name and address description	C an..35	D n4	Office number (0000 - 9999). Default value is 0000, if the element is missing.
C080	Party name	C	C	
3036	Party name	M an..35	R an..35	<b>Field (ZAPP):</b> <a href="#">Consignor (Name)</a> <b>Field (EXS):</b> <a href="#">Consignor (Name)</a>
C059	Street	C	C	
3042	Street and number or post office box identifier	M an..35	R an..35	<b>Field (ZAPP):</b> <a href="#">Consignor (Street)</a> <b>Field (EXS):</b> <a href="#">Consignor (Street)</a>
3164	City name	C an..35	R an..35	<b>Field in ZAPP:</b> <a href="#">Consignor (City)</a> <b>Field in EXS:</b> <a href="#">Consignor (City)</a>
C819	Country sub-entity details	C	N	
3229	Country sub-entity name code	C an..9	N	Not used
3251	Postal identification code	C an..17	D an..17	
3207	Country name code	C an..3	O an..3	<b>Field in ZAPP:</b> <a href="#">Consignor (Country)</a> <b>Field in EXS:</b> <a href="#">Consignor (Country)</a>

**Remark:**

**Example:**

NAD+CZ++NL454545555:2222+Shipping Company+40 Zhengu Road+Hong Kong++12345+CN'

Counte	No	Name	St	MaxOcc	Level	Label
	0560	<b>SG11</b> ( 4 )	O	1	1	Consignee
	0570	49 <b>NAD</b> ( 1 )	M	1	1	Information about the consignee

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
NAD				
3035	Party function code qualifier	M an..3	M an..3	<b>CN Consignee</b>
C082	Party identification details	C	N	
3039	Party identifier	M an..35	N	Not used
C058	Name and address	C	C	
3124	Name and address description	M an..35	M an..17	<b>EORI</b>
3124	Name and address description	C an..35	D n4	Office number (0000 - 9999). Default value is 0000, if the element is missing.
C080	Party name	C	D	
3036	Party name	M an..35	R an..35	<b>Field (ZAPP):</b> <a href="#">Consignee (Name)</a> <b>Field (EXS):</b> <a href="#">Consignee (Name)</a>
C059	Street	C	D	
3042	Street and number or post office box identifier	M an..35	R an..35	<b>Field (ZAPP):</b> <a href="#">Consignee (Street)</a> <b>Field (EXS):</b> <a href="#">Consignee (Street)</a>
3164	City name	C an..35	R an..35	<b>Field in ZAPP:</b> <a href="#">Consignee (City)</a> <b>Field in EXS:</b> <a href="#">Consignee (City)</a>
C819	Country sub-entity details	C	N	
3229	Country sub-entity name code	C an..9	N	Not used
3251	Postal identification code	C an..17	D an..17	
3207	Country name code	C an..3	R an..3	<b>Field in ZAPP:</b> <a href="#">Consignee (Country)</a> <b>Field in EXS:</b> <a href="#">Consignee (Country)</a>

**Remark:**

**Example:**

NAD+CN++DE454554500000002:0000+EMPFAENGER GMBH+STRASSE 72+DRESDEN++01900+DE'  
 NAD+CN+DE4854541++EMPFAENGER GMBH+Straße 72+DRESDEN++01900+DE'

Counte	No	Name	St	MaxOcc	Level	Label
0560		<b>SG11</b> ( 4 )	O	1	1	Consignee
0600		<b>SG12</b> ( 1 )	C	9	2	Notification contact
0610	50	<b>CTA</b> ( 1 )	M	1	2	Contact information

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
CTA				
3139	Contact function code	C an..3	R an..3	<b>NT Notification contact</b>

**Remark:**

**Example:**

CTA+NT'

Counte	No	Name	St	MaxOcc	Level	Label
	0560	<b>SG11</b> ( 4 )	O	1	1	<b>Consignee</b>
	0600	<b>SG12</b> ( 1 )	C	9	2	<b>Notification contact</b>
	0620	<b>COM</b> ( 1 )	R	9	3	<b>Communication contact</b>

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	
3155	Communication address code qualifier	M an..3	M an..3	<b>EM Electronic mail</b>

**Remark:**

**Example:**

COM+name@dakosy.de:EM'

Counte	No	Name	St	MaxOcc	Level	Label
	0560	<b>SG11</b> ( 4 )	O	1	1	Consignee
	0600	<b>SG12</b> ( 2 )	C	9	2	Consignees contact
	0610	<b>CTA</b> ( 1 )	M	1	2	Contact information

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
CTA				
3139	Contact function code	C an..3	C an..3	<b>CN Consignee</b>
C056	Department or employee details	C	R	
3413	Department or employee name code	C an..17	N	Not used
3412	Department or employee name	C an..35	R an..35	

**Remark:**

**Example:**

CTA+CN+:PETER MEIER'

Counte	No	Name	St	MaxOcc	Level	Label
	0560	<b>SG11</b> ( 4 )	O	1	1	Consignee
	0600	<b>SG12</b> ( 2 )	C	9	2	Consignees contact
	0620	53 <b>COM</b> ( 1 )	C	3	3	Communication contact

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	
3155	Communication address code qualifier	M an..3	M an..3	<b>EM</b> Electronic mail <b>TE</b> Telephone <b>FX</b> Telefax

**Remark:**

**Example:**

COM+X:EM'

Counte	No	Name	St	MaxOcc	Level	Label
	0560	<b>SG11</b> ( 5 )	O	1	1	Notify
	0570	<b>NAD</b> ( 1 )	M	1	1	Notify Party

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
NAD				
3035	Party function code qualifier	M an..3	M an..3	<b>N1 Notify party no. 1</b>
C082	Party identification details	C	N	
3039	Party identifier	M an..35	N	Not used
C058	Name and address	C	N	
3124	Name and address description	M an..35	N	Not used
C080	Party name	C	D	
3036	Party name	M an..35	O an..35	
C059	Street	C	C	
3042	Street and number or post office box identifier	M an..35	O an..35	
3164	City name	C an..35	O an..35	
C819	Country sub-entity details	C	N	
3229	Country sub-entity name code	C an..9	N	Not used
3251	Postal identification code	C an..17	O an..17	
3207	Country name code	C an..3	O an..3	

**Remark:**

**Example:**

NAD+N1+++VERGISSMEINNICHT AG+EINESTRASSE 99+LEIPZIG++03000+DE'

Counte	No	Name	St	MaxOcc	Level	Label
0560		<b>SG11</b> ( 6 )	O	1	1	Authorised official (SumA, ATLAS)
0570	55	<b>NAD</b> ( 1 )	M	1	1	Information about the authorised official

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
NAD				
3035	Party function code qualifier	M an..3	M an..3	<b>AG Agent/representative</b>
C082	Party identification details	C	D	
3039	Party identifier	M an..35	M an..17	<b>Field (SumA):</b> <a href="#">Entitled Disposition Party (TIN)</a> Will be removed in future versions. The usage of EORI and office number is recommended.
C058	Name and address	C	D	
3124	Name and address description	M an..35	M an..17	<b>EORI</b>
3124	Name and address description	C an..35	D n4	Office number (0000 - 9999). Default value is 0000, if the element is missing. <b>Office number</b>

**Remark:**

**Example:**

NAD+AG++DE56656565665555:0002'

NAD+AG++DE1234568:0000

Counte	No	Name	St	MaxOcc	Level	Label
0560		<b>SG11</b> ( 8 )	C	1	1	Custodian
0570	56	<b>NAD</b> ( 1 )	M	1	1	Custodian

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
NAD				
3035	Party function code qualifier	M an..3	M an..3	<b>SN Store keeper</b>
C082	Party identification details	C	D	Must be sent, if C058 is missing. Will be removed in a future version.
3039	Party identifier	M an..35	R an17	<b>Field (SumA):</b> <a href="#">Temporary Storage Keeper (TIN)</a>
C058	Name and address	C	D	Must be sent, if C082 is missing. Will become mandatory in a future version.
3124	Name and address description	M an..35	M an..17	<b>EORI</b>
3124	Name and address description	C an..35	D n4	Office number (0000 - 9999). Default value is 0000, if the element is missing.

**Remark:**

Either TIN or EORI must be sent.

**Example:**

NAD+SN++DE12345678901:0001'  
 NAD+SN++DE12345678901'  
 NAD+SN++DE12345678901:0000'  
 NAD+SN++DE12552278801:0001'

Counte	No	Name	St	MaxOcc	Level	Label
	0560	<b>SG11</b> ( 8 )	C	1	1	Custodian
	0740	<b>SG15</b> ( 2 )	R	1	2	RFF
	0750	<b>RFF</b> ( 1 )	M	1	2	Storage Location

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
	RFF			
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>WS Warehouse storage location number</b>
1154	Reference identifier	C an..70	M an..70	Code of the storage location

**Remark:**

**Example:**

RFF+WS:1'

Counte	No	Name	St	MaxOcc	Level	Label
0560		<b>SG11</b> ( 9 )	O	1	1	Information about the person lodging a declaration
0570	58	<b>NAD</b> ( 1 )	M	1	1	Name and address

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
NAD				
3035	Party function code qualifier	M an..3	M an..3	<b>PK Contact party</b>
C082	Party identification details	C	N	
3039	Party identifier	M an..35	N	Not used
C058	Name and address	C	M	
3124	Name and address description	M an..35	M an..35	The elements 3124 within this segment have to be used to submit the contact persons name
3124	Name and address description	C an..35	C an..35	The elements 3124 within this segment have to be used to submit the contact persons name
3124	Name and address description	C an..35	C an..35	The elements 3124 within this segment have to be used to submit the contact persons name
C080	Party name	C	M	
3036	Party name	M an..35	M an..35	The elements 3036 within this segment have to be used to submit the contact persons rank within the company
3036	Party name	C an..35	C an..35	The elements 3036 within this segment have to be used to submit the contact persons rank within the company
3036	Party name	C an..35	C an..35	The elements 3036 within this segment have to be used to submit the contact persons rank within the company

**Remark:**

**Example:**

NAD+PK++Paul Meier:abc:def+Prokurist:ghi:ijkl'

Counte	No	Name	St	MaxOcc	Level	Label
0560		<b>SG11</b> ( 9 )	O	1	1	Information about the person lodging a declaration
0600		<b>SG12</b> ( 1 )	M	9	2	<b>CTA-COM</b>
0610	59	<b>CTA</b> ( 1 )	M	1	2	Contact information

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
CTA				
3139	Contact function code	C an..3	C an..3	<b>IC Information contact</b>

**Remark:**

**Example:**

CTA+IC'

Counte	No	Name	St	MaxOcc	Level	Label
0560		<b>SG11</b> ( 9 )	O	1	1	Information about the person lodging a declaration
0600		<b>SG12</b> ( 1 )	M	9	2	CTA-COM
0620	60	<b>COM</b> ( 1 )	M	9	3	Contact details of responsible Person

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	Contact details of responsible Person
3155	Communication address code qualifier	M an..3	M an..3	<b>TE Telephone</b> <b>FX Telefax</b> <b>EM Electronic mail</b>

**Remark:**

**Example:**

COM+040370030:TE'

Counte	No	Name	St	MaxOcc	Level	Label
0560		<b>SG11</b> ( 1 ) 0	C	1	1	Vessel Operator
0570	61	<b>NAD</b> ( 1 )	M	1	1	Name and address

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
NAD				
3035	Party function code qualifier	M an..3	M an..3	<b>CPE Vessel master</b>
C082	Party identification details	C	R	
3039	Party identifier	M an..35	M an..35	
1131	Code list identification code	C an..17	N	Not used

**Remark:**

**Example:**

NAD+CPE+HJCU'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	<b>GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30</b>

0900 62 **GID** ( 1 ) M 1 1 **Package information**

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
<b>GID</b>				
1496	Goods item number	C n..5	R n..5	This is a sequential number starting with 1 and increased by 1 for each Goods Item (GID segment); 1, 2, 3... <b>Field in EXS:</b> <a href="#">Goods Item Number</a>
C213	Number and type of packages	C	D	
7224	Package quantity	C n..8	R n..8	<b>Field (SumA):</b> <a href="#">Number of packages</a> <b>Field (ZAPP):</b> <a href="#">Number of packages</a> <b>Field (EXS):</b> <a href="#">Number of packages</a>
7065	Package type description code	C an..17	R an..17	<b>Field (SumA):</b> <a href="#">Type of Packages</a> <b>Remark (SumA):</b> <a href="#">Mandatory for declaration of temporary storage</a> <b>Field (EXS):</b> <a href="#">Type of Packages</a> Code accd. Customs Codelist A1160 (german version as a part of the ATLAS guide at <a href="http://www.zoll.de/e0_downloads/edifact_release_8_3/index.html">http://www.zoll.de/e0_downloads/edifact_release_8_3/index.html</a> )

**Remark:**

**Example:**

GID+1+9:CT'

Counte	No	Name	St	MaxOcc	Level	Label
	0890	<b>SG18</b> ( 1 )	R	999	1	GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30
	0920	<b>TMP</b> ( 1 )	O	1	2	Temperature

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
TMP				
6245	Temperature type code qualifier	M an..3	M an..3	<b>2 Transport temperature</b>
C239	Temperature setting	C	M	
6246	Temperature value	C n..15	R n..5	
6411	Measurement unit code	C an..3	R an..3	<b>CEL degree Celsius</b> <b>FAH degree Fahrenheit</b>

**Remark:**

**Example:**

TMP+2+9:CEL'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30
0930	64	<b>RNG</b> ( 1 )	O	1	2	Range details

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RNG				
6167	Range type code qualifier	M an..3	M an..3	<b>12 Transport temperature range</b>
C280	Range	C	M	
6411	Measurement unit code	M an..3	R an..3	<b>CEL degree Celsius</b> <b>FAH degree Fahrenheit</b>
6162	Range minimum value	C n..18	R n..18	
6152	Range maximum value	C n..18	R n..18	

**Remark:**

**Example:**

RNG+12+CEL:9:9'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30
0950	65	<b>LOC</b> ( 2 )	D	1	2	Country of origin

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
LOC				
3227	Location function code qualifier	M an..3	M an..3	<b>27 Country of origin</b>
C517	Location identification	C	M	
3225	Location name code	C an..25	R a2	Country of Origin. Must be sent if the summary declaration of temporary storage should be triggered based on data from this IFTMCS message. <b>Field (SumA):</b> <a href="#">Country of Origin</a> <b>Field (ZAPP):</b> <a href="#">Country of Origin</a>

Remark:

Example:

LOC+27+CN'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30
0950	66	<b>LOC</b> ( 3 )	R	1	2	Country of destination

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
LOC				
3227	Location function code qualifier	M an..3	M an..3	<b>28 Country of destination of goods</b>
C517	Location identification	C	M	
3225	Location name code	C an..25	R a2	<b>Field (ZAPP):</b> <a href="#">Country of Destination</a>

**Remark:**

**Example:**  
LOC+28+RU'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0890		<b>SG18</b> ( 1 )	R	999	1	<b>GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30</b>
------	--	-------------------	---	-----	---	---

0950	67	<b>LOC</b> ( 4 )	D	1	2	<b>Place of (final) destination</b>
------	----	------------------	---	---	---	-------------------------------------

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
LOC				
3227	Location function code qualifier	M an..3	M an..3	<b>7 Place of delivery</b> In the previous version of the mig this segment accidentally has been described as LOC+8. This qualifier will still be accepted, but internally converted to LOC+7
C517	Location identification	C	M	
3225	Location name code	C an..25	N	Not used
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	N	Not used
3224	Location name	C an..256	R an..35	Final destination of goods. Must be sent if the summary declaration of temporary storage should be triggered based on data from this IFTMCS message. <b>Field (SumA):</b> <a href="#">Final Destination</a>

**Remark:**

**Example:**

LOC+7+:::MUENCHEN'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30
0970	68	<b>PIA</b> ( 1 )	D	1	2	Commodity code

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
PIA				
4347	Product identifier code qualifier	M an..3	M an..3	<b>5 Product identification</b>
C212	Item number identification	M	M	
7140	Item identifier	C an..35	R n..10	Commodity code. For certain use cases the 8- or 10-digit-combined-nomenclature code is required, but usually the 4-digit-code will be sufficient. <b>Field (EXS):</b> <a href="#">Goods Description</a>
7143	Item type identification code	C an..3	R an..3	<b>HS Harmonised system</b>

Remark:

Example:

PIA+5+1234:HS'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0890		<b>SG18</b> ( 1 )	R	999	1	GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30
------	--	-------------------	---	-----	---	--

0980	69	<b>FTX</b> ( 1 )	R	1	2	Goods Description
------	----	------------------	---	---	---	-------------------

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
FTX				
4451	Text subject code qualifier	M an..3	M an..3	<b>AAA Goods description</b>
4453	Free text function code	C an..3	N	Not used
C107	Text reference	C	D	The applicant is obliged to declare a particular range of commodities by adding an identifier in case of goods that are subject to certain restrictions (VuB).
4441	Free text value code	M an..17	M an..1	<b>A Plants, plant products and other goods subject to measures of prohibition or restriction regarding to plant inspections.</b> <b>B Live animals</b> <b>C Dead animals or products of animal origin that have to be veterinary inspected.</b> <b>D Pharmaceutical/ anaesthetic products</b> <b>E Weapons and ammunition</b> <b>F Radioactive materials</b> <b>G Waste materials</b> <b>H Explosives, pyrotechnic articles and other goods subject to the Explosives Act</b> <b>I Chemicals, chemical substances or preparations subject to official movement restriction</b> <b>J Goods subject to criminal movement restrictions (e.g. media involving unconstitutional or prohibited pornography contents)</b> <b>K Plants, animals or other goods subject to measures of prohibition or restriction.</b>
C108	Text literal	C	M	
4440	Free text value	M an..512	M an..256	<b>Field (SumA):</b> <a href="#">Goods Description</a> <b>Remark (SumA):</b> <a href="#">Common goods description</a> Please note that - depending on how the data is used - only parts of the summary declaration may be used. <b>Field (ZAPP):</b> <a href="#">Goods Description</a> <b>Field (EXS):</b> <a href="#">Warenbezeichnung</a> <b>Field (EXS):</b> <a href="#">Warenbezeichnung</a>

Remark:

Example:

'FTX+AAA+++GOODS DESCRIPTION'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	<b>GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30</b>
0980	70	<b>FTX</b> ( 2 )	D	1	2	<b>Customs goods status</b>

**Remark:** Mandatory if the IFTMCS data is used for a summary declaration of temporary storage

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
FTX				
4451	Text subject code qualifier	M an..3	M an..3	<b>AAH Customs information</b>
4453	Free text function code	C an..3	N	Not used
C107	Text reference	C	N	
4441	Free text value code	M an..17	N	Not used
C108	Text literal	C	M	
4440	Free text value	M an..512	R an1	Only used when using the IFTMCS to submit data for the summary declaration of temporary storage to the IMP. This field contains the current customs status of the goods in coded form. In DEHAM you always must send 'N' due to local conditions and coordination. Other arrangements may apply when using at other locations. <b>Field (SumA):</b> <a href="#">Customs status of goods</a> <b>N</b> third country goods (standard value) <b>C</b> Union goods (value not allowed in DEHAM)

**Remark:**

**Example:**

FTX+AAH+++N'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	<b>GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30</b>
0980	71	<b>FTX</b> ( 3 )	D	1	2	<b>Free text</b>

**Remark:** Used only if the IFTMCS data is used for the summary declaration of temporary storage

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
FTX				
4451	Text subject code qualifier	M an..3	M an..3	<b>MKS Additional marks/numbers information</b>
4453	Free text function code	C an..3	N	Not used
C107	Text reference	C	N	
4441	Free text value code	M an..17	N	Not used
C108	Text literal	C	M	
4440	Free text value	M an..512	R an..512	This field content will be sent to customs as a unique reference when using the IFTMCS data for the summary declaration of temporary storage. If FTX+MKS is not submitted, a combination of B/L-No., Containernumber and current date is used. <b>Field (SumA):</b> <a href="#">Unique Reference (SpO)</a> <b>Remark (SumA):</b> <a href="#">B/L-NO.+Containerno.</a> <a href="#">+Date(YYYYMMDDHHMM)</a> will be used as <a href="#">SpO</a> if this field is not used

**Remark:**

**Example:**

'FTX+MKS+++XC10444D5'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	<b>GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30</b>
1040		<b>SG20</b> ( 1 )	R	1	2	<b>MEA</b>
1050	72	<b>MEA</b> ( 1 )	M	1	2	<b>Gross Weight (Goods Item Level)</b>

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
<b>MEA</b>				
6311	Measurement purpose code qualifier	M an..3	M an..3	<b>AAE Measurement</b>
C502	Measurement details	C	M	
6313	Measured attribute code	C an..3	R an..3	<b>G Gross weight</b>
C174	Value/range	C	M	
6411	Measurement unit code	M an..3	R an..3	<b>KGM kilogram</b>
6314	Measurement value	C an..18	R n..14	Gross weight of the goods, including packaging and other material. Format: 14,3 - Three decimals after the comma are allowed; the unit is kilogram. <b>Field (ZAPP):</b> <a href="#">Gross Weight</a> <b>Field (EXS):</b> <a href="#">Gross Weight</a>

**Remark:**

**Example:**

MEA+AAE+G+KGM:22500'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0890		<b>SG18</b> ( 1 )	R	999	1	<b>GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30</b>
------	--	-------------------	---	-----	---	---

1100		<b>SG22</b> ( 1 )	D	1	2	<b>Information about the previous document (ICS1, will be removed)</b>
------	--	-------------------	---	---	---	--

**Remark:** Required for local summary declaration ("Import SumA), if MRN from entry summary declaration exists  
This segment group has to be specified for the creation of a summary declaration (RFF+BGM:929). Either the MRN of an ENS declaration must be specified or the respective exemption.

1110	73	<b>RFF</b> ( 1 )	M	1	2	<b>MRN of ENS declaration (Goods Item level) or exemption</b>
------	----	------------------	---	---	---	---

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<p><b>MRN Mailing reference number</b>  <b>AEI Registration number of previous Customs declaration</b></p> <p>In order to harmonise the interfaces, the qualifier AEI has been introduced. AEI and MRN may be used synonymously. Since the qualifier "MRN" will be removed in later versions, the usage of "AEI" is recommended.</p>
1154	Reference identifier	C an..70	D an..30	<p>NOTE: Might be used only if no MRN has been provided on header level.</p> <p>If the summary declaration of temporary storage should be triggered based on data from this IFTMCS message and an MRN number is indicated here, IMP will assume that the summary declaration has been preceded by an entry summary declaration with the MRN provided.</p> <p>The exemption reason has to be specified in case of previous document type OESUMA (e.g. transports within Europe).  <b>Field (SumA):</b> <a href="#">MRN from ENS Declaration (Goods Item Level)</a></p> <p>Length depending on the previous document type:  ESUMA: an18 (MRN)  OESUMA: an..30 (exemption)</p>
1156	Document line identifier	C an..6	D an..5	<p>Mandatory field in case of previous document type OESUMA  Mandatory, if type of previous document is ESUMA: Position ID of an MRN from a previous entry summary declaration</p>
4000	Reference version identifier	C an..35	D an..6	<p><b>ESUMA MRN of an Entry summary declaration</b>  <b>OESUMA An entry summary declaration has not been required, e. g. transports within Europe</b>  <b>Previous document type</b>  Default value is ESUMA.</p>

**Remark:** The MRN from a Customs transit procedure must not be entered here. Goods, which have been loaded in Norway, have to be marked with country code 'NO'.

**Example:**

```
RFF+AEI:19BEN1234567890125:1:ESUMA'  
RFF+AEI:Art 136 UZK und Art 104 UZK-DA::OESUMA  
RFF+AEI:NO::OESUMA
```

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	<b>GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30</b>
1100		<b>SG22</b> ( 2 )	D	1	2	<b>Information about the previous document (valid with introduction of ICS2)</b>
1110	74	<b>RFF</b> ( 1 )	M	1	2	<b>MRN of ENS declaration (Goods Item level) or exemption</b>

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>AEI Registration number of previous Customs declaration</b>
1154	Reference identifier	C an..70	D an..30	NOTE: Might be used only if no MRN has been provided on header level.  If the summary declaration of temporary storage should be triggered based on data from this IFTMCS message and an MRN number is indicated here, IMP will assume that the summary declaration has been preceded by an entry summary declaration with the MRN provided.  The exemption reason has to be specified in case of previous document type OESUMA (e.g. transports within Europe). <b>Field (SumA):</b> <a href="#">MRN from ENS Declaration (Goods Item Level)</a> Length depending on the previous document type: N355: an18 (MRN) OESUMA: an..30 (exemption)
1156	Document line identifier	C an..6	N	Mandatory field in case of previous document type OESUMA Not used
4000	Reference version identifier	C an..35	R an..6	<b>N355 MRN of an Entry summary declaration from ICS2</b> <b>OESUMA An entry summary declaration has not been required, e. g. transports within Europe</b> <b>Previous document type</b>

**Remark:**

The MRN from a Customs transit procedure must not be entered here. Goods, which have been loaded in Norway, have to be marked with country code 'NO'.

**Example:**

```
RFF+AEI:23FR1234567890125::N355'  
RFF+AEI:Art 136 UZK und Art 104 UZK-DA::OESUMA  
RFF+AEI:NO::OESUMA
```

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30
1100		<b>SG22</b> ( 3 )	D	9	2	transport document
1110	75	<b>RFF</b> ( 1 )	M	1	2	Reference

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>ZZZ Mutually defined reference number</b>
1154	Reference identifier	C an..70	R an..70	<b>bl reference</b>
1156	Document line identifier	C an..6	R an4	<b>N704 Master bill of lading</b> <b>N705 Bill of Lading</b> <b>N714 House bill of lading</b>

**Remark:**

**Example:**

RFF+ZZZ:BLREFERENCE:N705'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30
1100		<b>SG22</b> ( 4 )	C	9	2	Carriers's EORI
1110	76	<b>RFF</b> ( 1 )	M	1	2	Reference

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>ADZ Trader account number</b>
1154	Reference identifier	C an..70	R an..70	<b>EORI</b>
1156	Document line identifier	C an..6	D an4	<b>Subsidiary number</b>

**Remark:**

**Example:**

RFF+ADZ:DE001234567:0000'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	<b>GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30</b>
1100		<b>SG22</b> ( 5 )	C	9	2	<b>MRN (pre-arrival declaration)</b>
1110	77	<b>RFF</b> ( 1 )	M	1	2	<b>Reference</b>

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>AEI Registration number of previous Customs declaration</b>
1154	Reference identifier	C an..70	R an..18	MRN of an export procedure. May be specified if the goods were loaded in an European port. An existing export declaration is required and the export procedure has to be completed in another port. A German MRN (DE at digit 3-4) must not be specified.
1156	Document line identifier	C an..6	N	Not used
4000	Reference version identifier	C an..35	R an..35	<b>AE Export procedure</b> <b>ENS Entry Summary Declaration</b>

**Remark:**

**Example:**

RFF+AEI:12SEE4RJ0H591PAIX4::AE'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	<b>GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30</b>
1130		<b>SG23</b> ( 1 )	O	9	2	<b>PCI</b>
1140	78	<b>PCI</b> ( 1 )	M	1	2	<b>Marks &amp; Numbers</b>

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
PCI				
4233	Marking instructions code	C an..3	N	Not used
C210	Marks & labels	C	M	
7102	Shipping marks description	M an..35	M an..35	Marks & Numbers, Part 1
7102	Shipping marks description	C an..35	O an..35	Marks & Numbers, Part 2
7102	Shipping marks description	C an..35	O an..35	Marks & Numbers, Part 3
7102	Shipping marks description	C an..35	O an..35	Marks & Numbers, Part 4

**Remark:**

**Example:**

PCI++MARKS : AND : NUMBERS : ABCD '

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	<b>GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30</b>
1260		<b>SG27</b> ( 1 )	D	999	2	<b>SGP-SG28</b>

**Remark:** Mandatory for containerised goods or vehicles. It is strongly recommended, that is used for break bulk, too.

1270 79 **SGP** ( 1 ) M 1 2 **Container Numbers, VINs or break bulk references**

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
SGP				
C237	Equipment identification	M	M	
8260	Equipment identifier	C an..17	R an..17	<b>Field (ZAPP):</b> <a href="#">Container Number</a> <b>Field (EXS):</b> <a href="#">Container Number</a>
7224	Package quantity	C n..8	D n..5	Number of packages allocated to this container. Must be sent if the summary declaration of temporary storage should be triggered based on data from this IFTMCS message and the goods are containerized. <b>Field in SumA:</b> <a href="#">Number of Packages</a>

**Remark:**

**Example:**

SGP+CARR3322115+8'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	<b>GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30</b>
1260		<b>SG27</b> ( 1 )	D	999	2	<b>SGP-SG28</b>
1290		<b>SG28</b> ( 1 )	D	1	3	<b>MEA</b>

**Remark:** Mandatory, if a summary declaration ("Import SumA") shall be generated.

1300 80 **MEA** ( 1 ) M 1 3 **Weight per container**

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
MEA				
6311	Measurement purpose code qualifier	M an..3	M an..3	<b>WT Weights</b>
C502	Measurement details	C	M	
6313	Measured attribute code	C an..3	R an..3	<b>G Gross weight</b>
C174	Value/range	C	R	
6411	Measurement unit code	M an..3	M an..3	<b>KGM kilogram</b>
6314	Measurement value	C an..18	R n..14	Gross Weight of the part of the goods which have been loaded in the container indicated in the SGP segment.  Format: 14,3  Please note, that depending on the processing system the accepted format may differ. Following format is recommended:  n..6 (5,1) Max.5 digits, one decimal.

**Remark:**

**Example:**

MEA+WT+G+KGM: 398.1'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	<b>GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30</b>
1410		<b>SG30</b> ( 1 )	O	99	2	<b>DGS-FTX</b>
1420	81	<b>DGS</b> ( 1 )	M	1	2	<b>DG Information</b>

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
DGS				
8273	Dangerous goods regulations code	C an..3	C an..3	<b>IMD IMO IMDG code</b>
C205	Hazard code	C	M	
8351	Hazard identification code	M an..7	M an..7	DG Code
C234	UNDG information	C	M	
7124	United Nations Dangerous Goods (UNDG) identifier	C n4	R n4	UNDG Code Field (EXS): <a href="#">UNDG Code</a>
C223	Dangerous goods shipment flashpoint	C	C	
7106	Shipment flashpoint value	C n3	O n3	Flashpoint
6411	Measurement unit code	C an..3	D an..3	<b>CEL degree Celsius</b> <b>FAH degree Fahrenheit</b> Should be provided if a flashpoint is given
8339	Packaging danger level code	C an..3	O an..3	Packing Group

**Remark:**

**Example:**

DGS+IMD+3.1+9999+999:CEL+1'

Counte	No	Name	St	MaxOcc	Level	Label
0890		<b>SG18</b> ( 1 )	R	999	1	<b>GID-TMP-RNG-LOC-PIA-FTX-SG20-SG22-SG23-SG27-SG30</b>
1410		<b>SG30</b> ( 1 )	O	99	2	<b>DGS-FTX</b>
1430	82	<b>FTX</b> ( 1 )	O	1	3	<b>Technical name (DGS)</b>

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
FTX				
4451	Text subject code qualifier	M an..3	M an..3	<b>AAD Dangerous goods, technical name</b>
4453	Free text function code	C an..3	N	Not used
C107	Text reference	C	N	
4441	Free text value code	M an..17	N	Not used
C108	Text literal	C	R	
4440	Free text value	M an..512	R an..70	DG Technical Name
4440	Free text value	C an..512	O an..70	
4440	Free text value	C an..512	O an..70	
4440	Free text value	C an..512	O an..70	
4440	Free text value	C an..512	O an..70	

**Remark:**

**Example:**

'FTX+AAD+++X:X:X:X:X'

Counte	No	Name	St	MaxOcc	Level	Label
1550		<b>SG35</b> ( 1 )	R	99999	1	<b>EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37</b>
1560	83	<b>EQD</b> ( 1 )	M	1	1	<b>Container-, Vehicle- or Break Bulk information</b>

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
<b>EQD</b>				
8053	Equipment type code qualifier	M an..3	M an..3	<b>CN Container</b> <b>VIN Vehicle Identification Number</b> <b>BB Break Bulk</b>
C237	Equipment identification	C	R	
8260	Equipment identifier	C an..17	R an..17	Container Number, Vehicle Identification Number (in case of car transport) or B/L number (break bulk)
C224	Equipment size and type	C	D	Mandatory for containers.
8155	Equipment size and type description code	C an..10	D an..10	Container SizeType (accd. ISO); Mandatory if element 8053 in this segment has the value 'CN'
8077	Equipment supplier code	C an..3	D an1	<b>1 Shipper supplied</b> <b>2 Carrier supplied</b> Shipper's Own Indicator; Mandatory if element 8053 in this segment has the value 'CN'
8249	Equipment status code	C an..3	N	Not used
8169	Full or empty indicator code	C an..3	D an1	<b>4 Empty</b> <b>5 Full</b> Full/Empty Indicator; Mandatory if element 8053 in this segment has the value 'CN'

**Remark:**

For the usage of Breakbulk, please refer to the example below. The reference used to identify SGP/EQD has to be defined by the message sender. It is recommended, that this reference refers to the B/L number.

**Example:**

EQD+CN+CARR3322115+22G0+1++4'

GID+1+1:ZZ'

SGP+BSP0000X1+1'

GID+2+1:ZZ'

SGP+BSP0000X2+1'

EQD+BB+BSP0000X1'

EQD+BB+BSP0000X2'

Counte	No	Name	St	MaxOcc	Level	Label
	1550	<b>SG35</b> ( 1 )	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37
	1590	<b>MEA</b> ( 1 )	O	2	2	Measurements

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
MEA				
6311	Measurement purpose code qualifier	M an..3	M an..3	<b>AAE Measurement</b>
C502	Measurement details	C	M	
6313	Measured attribute code	C an..3	R an..3	<b>T Tare weight G Gross weight</b>
C174	Value/range	C	R	
6411	Measurement unit code	M an..3	R an..3	<b>KGM kilogram</b>
6314	Measurement value	C an..18	R an..18	

**Remark:**

**Example:**

MEA+AAE+T+KGM: 4000 '

MEA+AAE+G+KGM: 9320 '

Counte	No	Name	St	MaxOcc	Level	Label
1550		<b>SG35</b> ( 1 )	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37
1600	85	<b>DIM</b> ( 1 )	O	5	2	Dimensions

Remark: Off dimension information

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
DIM				
6145	Dimension type code qualifier	M an..3	M an..3	<b>5 Off-standard dimension front</b> <b>6 Off-standard dimension back</b> <b>7 Off-standard dimension right</b> <b>8 Off-standard dimension left</b> <b>9 Off-standard dimension general</b>
C211	Dimensions	M	R	At least one value has to be set.
6411	Measurement unit code	M an..3	M an..3	<b>CMT centimetre</b>
6168	Length dimension value	C n..15	D n..4	Length
6140	Width dimension value	C n..15	D n..4	Width
6008	Height dimension value	C n..15	D n..4	Height

Remark:

Example:

DIM+9+CMT:9:9:9'

Counte	No	Name	St	MaxOcc	Level	Label
1550		<b>SG35</b> ( 1 )	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37
1610	86	<b>SEL</b> ( 1 )	O	99	2	Seal IDs

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
SEL				
9308	Seal identifier	C an..35	R an..20	Seal Number
C215	Seal issuer	C	R	
9303	Sealing party name code	C an..3	R an..3	<b>AB Unknown</b> Seal issuer. Currently, only code AB for "unknown" is allowed

**Remark:**

**Example:**

SEL+1210404+AB'

Counte	No	Name	St	MaxOcc	Level	Label
1550		<b>SG35</b> ( 1 )	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37
1620	87	<b>TPL</b> ( 1 )	O	1	2	Transport placement

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
TPL				
C222	Transport identification	M	M	
8213	Transport means identification name identifier	C an..9	R an..9	<b>BARGE</b> <b>RAIL</b> <b>SEA</b> <b>TRUCK</b> On carriage transport mode. Code "BARGE" includes any inland waterway transport.
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	N	Not used
8212	Transport means identification name	C an..35	O an..35	

**Remark:**

**Example:**

TPL+SEA:::MS Montana'

Counte	No	Name	St	MaxOcc	Level	Label
1550		<b>SG35</b> ( 1 )	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37
1640	88	<b>TMP</b> ( 1 )	D	1	2	Temperature

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
TMP				
6245	Temperature type code qualifier	M an..3	M an..3	<b>2 Transport temperature</b>
C239	Temperature setting	C	C	
6246	Temperature value	C n..15	R n..15	
6411	Measurement unit code	C an..3	R an..3	<b>CEL degree Celsius</b>

**Remark:**

**Example:**

TMP+2+-040:CEL'

TMP+2+005:CEL'

Counte	No	Name	St	MaxOcc	Level	Label
1550		<b>SG35</b> ( 1 )	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37
1650	89	<b>FTX</b> ( 1 )	O	1	2	Free text

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
FTX				
4451	Text subject code qualifier	M an..3	M an..3	<b>ACQ Off-dimension information</b>
4453	Free text function code	C an..3	N	Not used
C107	Text reference	C	N	
4441	Free text value code	M an..17	M an..17	
C108	Text literal	C	R	
4440	Free text value	M an..512	R an..512	Textual information about oversized equipment

**Remark:**

**Example:**

FTX+ACQ+++X'

Counte	No	Name	St	MaxOcc	Level	Label
1550		<b>SG35</b> ( 1 )	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37
1660	90	<b>RFF</b> ( 1 )	O	9	2	Reference

**Remark:** System specific voyage numbers (BIP or IMP)

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<p><b>SIS SIS Number</b>  <b>DAK DAKOSY conveyance number</b>                      The SIS number is applicable in dbh's BIP-system.                      The DAKOSY voyage number is applicable in IMP (Hamburg)</p>
1154	Reference identifier	C an..70	R an..70	<p><b>Remark (ZAPP):</b> <a href="#">Format:</a>  <a href="#">AN3 - DAKOSY-liner agents code</a>  <a href="#">AN4 - identifier</a></p>

**Remark:**

**Example:**

RFF+SIS:ABCD0001W'  
 RFF+DAK:DKL4711'  
 RFF+DAK:MAE3A11'

Counte	No	Name	St	MaxOcc	Level	Label
1550		<b>SG35</b> ( 1 )	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37
1660	91	<b>RFF</b> ( 2 )	O	9	2	Booking number

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>BN Booking reference number</b>
1154	Reference identifier	C an..70	R an..35	Carriers booking reference

**Remark:**

**Example:**

RFF+BN:HKG10X00102'

Counte	No	Name	St	MaxOcc	Level	Label
1550		<b>SG35</b> ( 1 )	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37
1660	92	<b>RFF</b> ( 3 )	D	9	2	Customs Reference to summary declaration (ATB no)

**Remark (ZAPP):** If no registration number is provided, this will be interpreted as "A summary declaration of temporary storage was not required"

**Remark (SumA):** ATB Number. Mandatory when updating or confirming an existing preliminary/partially confirmed SumA.

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>XC Cargo control number</b>
1154	Reference identifier	C an..70	R an..21	

**Remark:**

**Example:**

RFF+XC:ATB120005410540540'

Counte	No	Name	St	MaxOcc	Level	Label
1550		<b>SG35</b> ( 1 )	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37
1660	93	<b>RFF</b> ( 4 )	C	9	2	Reference

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	

**Remark:**

**Example:**

RFF+AAA'

Counte	No	Name	St	MaxOcc	Level	Label
1550		<b>SG35</b> ( 1 )	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37
1660	94	<b>RFF</b> ( 5 )	C	9	2	Reference

**Remark:** Required, if a transport order shall be generated of the data.

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	<b>ADN Inland transport order number</b>
1154	Reference identifier	C an..70	R an..30	

**Remark:**

**Example:**

RFF+ADN:TPREF123'

Counte	No	Name	St	MaxOcc	Level	Label
1550		<b>SG35</b> ( 1 )	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37
1750		<b>SG37</b> ( 1 )	O	1	2	Container Operator
<b>Remark:</b> Container Operator						
1760	95	<b>NAD</b> ( 1 )	M	1	2	Name and address

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
NAD				
3035	Party function code qualifier	M an..3	M an..3	<b>CF Container operator/lessee</b>
C082	Party identification details	C	C	
3039	Party identifier	M an..35	M an..35	DAKOSY or SCAC Code of the on carriage container operator. DAKOSY code is recommended.
C058	Name and address	C	C	
3124	Name and address description	M an..35	M an..35	Empty container return depot

**Remark:**

**Example:**

NAD+CF+DAKO+DAK'

Counte	No	Name	St	MaxOcc	Level	Label
1550		<b>SG35</b> ( 1 )	R	99999	1	EQD-MEA-DIM-SEL-TPL-TMP-FTX-RFF-SG37
1750		<b>SG37</b> ( 2 )	D	1	2	Transportorder: Delivery address
1760	96	<b>NAD</b> ( 1 )	M	1	2	Name and address

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
NAD				
3035	Party function code qualifier	M an..3	M an..3	<b>UC Ultimate consignee</b>
C082	Party identification details	C	C	
3039	Party identifier	M an..35	M an..35	
C058	Name and address	C	C	
3124	Name and address description	M an..35	M an..35	
3124	Name and address description	C an..35	C an..35	
C080	Party name	C	C	
3036	Party name	M an..35	N	Not used
3036	Party name	C an..35	C an..35	
C059	Street	C	C	
3042	Street and number or post office box identifier	M an..35	M an..35	
3164	City name	C an..35	C an..35	
C819	Country sub-entity details	C	C	
3229	Country sub-entity name code	C an..9	C an..9	
3251	Postal identification code	C an..17	C an..17	
3207	Country name code	C an..3	C an..3	

**Remark:**

**Example:**

NAD+UC+X+X:X+:X+X+X+X+X+AD'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

1870 97 **UNT** ( 1 ) M 1 0 **Message trailer**

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
UNT				
0074	Number of segments in the message	M n..6	M n..6	
0062	Message reference number	M an..14	M an..14	

**Remark:**

**Example:**

UNT+90+20100122171055'

Counte	No	Name	St	MaxOcc	Level	Label
--------	----	------	----	--------	-------	-------

0000 98 **UNZ** ( 1 ) M 1 0 Interchange trailer

Standard			Implementation	
Bez	Name	St Format	St Format	Usage / Comment
UNZ				
0036	Interchange control count	M n..6	M n..6	
0020	Interchange control reference	M an..14	M an..14	

**Remark:**

**Example:**

UNZ+1+20240123100000'